

spinlock
BE ADVENTURE-PROOF



2018

WELCOME

TO THE TRADE GUIDE 2018



Spinlock continue to push through new performance from our products, driven by the demands of customers such as the Volvo Ocean Race. As an Official Supplier to the Volvo Ocean Race, our equipment is selected following trial and evaluation, whilst custom product is developed especially to meet performance demands.

The VOR65 fleet is equipped with a full Spinlock rope holding package with new Ceramic coated jaws and cams introduced for 2017, coupled with high load organisers and pad eyes.

All of the Volvo Ocean race crews will all be wearing the very latest in personal flotation from Spinlock, a new custom Lifejacket produced in conjunction with sailors from the race. Lighter, closer fitting, easier to use, with new built in features such as a quick release harness. The VOR Deckvest Lifejacket really is the next generation of Lifejacket harness.



Spinlock Limited quality management system is accredited to:
EN ISO9001:2015
by SGS Quality Assurance

Product Photography: Richard Boll
www.richardbollphotography.com

DECKWARE

PERSONAL PROTECTION

Product Selection & Support /1	
04	Lifejacket Comparison Chart
05	Deckvest 5D Explained

Lifejacket	
06-07	Deckvest 5D
08	Deckvest LITE
09	Deckvest LITE+
10	Deckvest CENTO
12	Deckvest LITE USCG
15	Deckvest SOLAS
17	Deckvest DURO

Personal Protection	
19	AIS MOB1
20	Lume-On™ Pylon™
21	Safety Lines Safety Line Cutter
22	Packs Deck Pack
23	Deck Pro Knee Pads
24	Mast Pro Tripping Spike
26-27	WING & FOIL
28	AERO PRO
30	Upgrades & Spares
31	Fitted Accessories

Product Selection & Support /2	
32	Inflation Systems
33	Size Guides Deckware Weights

HARDWARE

ROPE HOLDING

36	Sense Load Cells
37	Rig Sense Sense Apps

Low Load Rope Holding /1	
38-39	PXR Cam Cleat

Mid Load Rope Holding	
40-41	XAS Powerclutch
42	XTS Powerclutch
43	XCS Powerclutch
44	XTR Powerclutch
45	ZR Jammer

High Load Rope Holding	
46-47	XX Series - XXA , XXB & XXC Powerclutch
48	ZS Alloy Powerjammer
49	ZS Carbon Powerjammer
50	ZS-RLB Remote Release ZS Open Powerjammer

Rope Management /1	
51	PD Carbon Padeyes
52	TSR Fully Customisable Organiser
54	TSR Organiser
55	TSR Low Sheave Organiser
56	T25 Organiser BE10 Multiple Bullseye
57	T38, T50 & TC50 Organisers

Boat Control	
58	EJB Tiller Extension
59	EA Tiller Extension
60	EJ Tiller Extension

Rope Management /2	
61	WL Line Leads BE Bullseye
62	BRS Spinnaker Block TWF Winchfeeder
63	RF Sail Feeder

Speed Control	
63	ATCU Throttle Control

Low Load Rope Holding /2	
64	SUA Mini Jammer

Rope Coating	
64	RP25 Rope Coating

Upgrades & Spares	
65-66	Upgrades & Spares

Product Support	
67-68	Weights & Fasteners
69-73	Dimensions









MARKETING

MATERIALS MENU

74	Marketing Materials Menu
75	Deckware Retail Display Accessories
76	Deckware Retail Graphics & Posters
77	Deckware & Hardware Displays & Retail Shelves Retail Ideas

LIFEJACKET

COMPARISON CHART

Product	Deckvest 5D	Deckvest LITE+	Deckvest LITE	Deckvest CENTO	Deckvest SOLAS	Deckvest DURO	AERO PRO	WING & FOIL
Recommended for:	All sailors who require a full specification lifejacket with deck harness	Those wanting a lightweight lifejacket with the added security of a harness	Fastcraft, all sail & power boats. Ideal for inshore & coastal waters	Junior sailors approximately 8- 15 years old who weigh 20-50kg	Superyachts, commercial & marine professionals requiring SOLAS approved PPE	Commercial and marine professionals	For high agility dinghy, multihull and keelboat sailing	Performance keelboat, dinghies, RIBs and Watersports
50N Buoyancy	x	x	x	x	x	x	✓	✓
100N Buoyancy	x	x	x	✓	x	x	x	x
170N Buoyancy	✓	✓	✓	x	x	✓	x	x
275N Buoyancy	✓	x	x	x	x	✓	x	x
275N Twin Chamber	x	x	x	x	✓	x	x	x
UML Mk5	x	✓	✓	✓	✓	✓ Standard	x	x
UML Pro Sensor	✓	x	x	x	x	✓ Optional	x	x
Hammar®	✓	x	x	x	x	x	x	x
Size	1, 2, 3	One Size	One Size	One Size	One Size	One Size	S, M, L	XS, S, M, L, XL
Colour								
Harness	✓	✓	x	✓	x	x	x	x
Pack Attachment Points	✓	✓	✓	✓	✓	✓	x	x
Crotch Straps	✓	✓	✓	✓	✓	✓	x	x
Sprayhood	✓	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	-	-
Safety Line Cutter	✓	Optional Accessory	-	Optional Accessory	-	-	-	-
Pylon™ Lifejacket Light	✓	Optional Accessory	Optional Accessory	Optional Accessory	✓	Optional Accessory	Optional Accessory	Optional Accessory
Lume-On™ Lights	✓	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory
AIS MOB1	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	x	x
5 Year Warranty*	✓	✓	✓	✓	-	-	2 years	2 years
Through Life Support™	✓	✓	✓	✓	✓	✓	✓	✓

*Subject to registration

DECKVEST 5D

EXPLAINED



DECKVEST 5D

Full specification automatic inflating lifejacket harness



Target Users

Full specification offshore lifejacket harness

Features

170N (38lbs) or 275N (62lbs) buoyancy

Very light, comfortable design for use over long periods

Compact and unobtrusive

Shoulder Fit System™ - flexes and locates to ensure correct fit on shoulders, not the neck, everytime

Back adjustment - hidden and non-snag for easy, simple adjustment

Pylon™ Light - high intensity, water activated flashing LED light. 23cm flexible antenna wand gives improved light visibility above head and water. (See page 20 for more details)

Deck safety harness with soft loop attachment point - ready for clipping on

Low profile collar gives improved fit and reduced fatigue

Sprayhood fitted – reduces risk of spray inhalation and secondary drowning, fitted as standard on Deckvest 5D

Mesh pocket for quick storage



New Lume-On™ lights fitted as standard



Inflation System Options

UML Pro Sensor - Water sensitive activation system - with single point indication

Uses a compressed paper capsule

Hammar Hydrostatic - Activated by water pressure and will not inflate until the cap is approximately 10cm underwater

See page 32 for more information on inflation systems

275N Benefits


170N is the recommended buoyancy for offshore sailing. Although bulkier, a 275N lifejacket can be of benefit to certain users

Will turn over a face-down body quicker, especially in full wet weather gear

Holds the user's head 5cm higher out of water

Supports the extra weight of tools or equipment and provides extra flotation for commercial users

Manual activation kit available for 170N & 275N lifejackets – Pro Sensor only

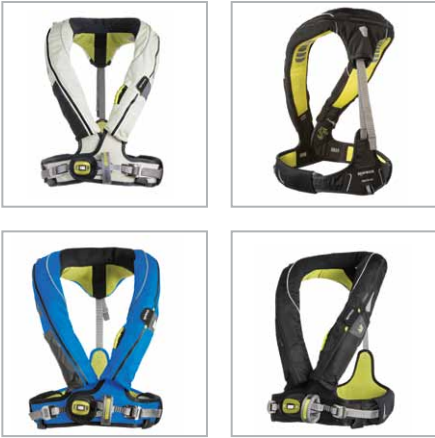

Deckvest 5D 170N Pro Sensor	
DW-LJH5D/A1	Size 1, Black
DW-LJH5D/A2	Size 2, Black
DW-LJH5D/A3	Size 3, Black
DW-LJH5D/A1TW	Size 1, Tropic White
DW-LJH5D/A2TW	Size 2, Tropic White
DW-LJH5D/A3TW	Size 3, Tropic White
DW-LJH5D/A1PB	Size 1, Pacific Blue
DW-LJH5D/A2PB	Size 2, Pacific Blue
DW-LJH5D/A3PB	Size 3, Pacific Blue

Deckvest 5D 170N Hammar	
DW-LJH5D/H1	Size 1, Black
DW-LJH5D/H2	Size 2, Black
DW-LJH5D/H3	Size 3, Black

Deckvest 5D 275N Pro Sensor	
DW-LJH5D/P2	Size 2, Black
DW-LJH5D/P3	Size 3, Black

	Black
	Tropic White
	Pacific Blue

CE Approved
ISO12402-3 Lifejacket
ISO12401 Deck Harness
ISO12402-2 275N

DECKVEST LITE

Ultra lightweight Lifejacket



Target Users

Ideal for fastcraft, RIBs, power and sail boating, paddle sport, fishing and open powercraft

Features

- New clean, contemporary design
- Tonal colour blocking panels for refreshed look
- Designed for the perfect fit - every time
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- 170N (38lbs) buoyancy
- One size
- Single crotch strap with recessed clip reduces risk of snagging

- Muted highly reflective panel detail
- Clipping area for PLB / VHF
- Attachment point for optional sprayhood (see page 30)
- Attachment point for Chest Pack (see page 22)
- Attachment point for kill cord or VHF leash
- Webbing end tidy

Inflation System

UML Mk5 + Mk5i firing cap - Water sensitive activation system which uses a compressed paper capsule (see page 32)

Part No.	Description
DW-LTE/A	Deckvest LITE, Black
DW-LTE/ATW	Deckvest LITE, Tropic White
DW-LTE/APB	Deckvest LITE, Pacific Blue
DW-LTE/AGP	Deckvest LITE, Grenadine Pink
DW-LTE/AFG	Deckvest LITE, Flow Green
DW-SHD/170-F	LITE sprayhood Fitted
DW-PYL/L1-F	Pylon™ lifejacket light Fitted
DW-LMN-F	Lume-On™ Fitted
DW-MAK-F	UML Manual Conversion Kit Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted

OPTIONAL FITTING	
- Pylon™ Lifejacket Light	
- Lume-On™ Bladder Illumination Lights	
- Sprayhood	
- AIS MOB1 Unit	

	Black		Tropic White
	Pacific Blue		Flow Green
	Grenadine Pink		

CE Approved	ISO12402-3 Lifejacket
-------------	-----------------------

DECKVEST LITE+

Ultra lightweight Lifejacket with harness



Target Users

Ideal for those wanting a lightweight lifejacket with the added security of a harness

Features

- Brand new harness version of the popular Deckvest LITE
- Lifejacket Harness with soft loop safety line clipping point
- Quick and easy to use anodised buckle
- Designed for the perfect fit - every time
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- 170N (38lbs) buoyancy
- One size

- Single crotch strap with recessed clip reduces risk of snagging
- Clipping area for PLB / VHF
- Attachment point for optional sprayhood (see page 30)
- Attachment points for Chest Pack (see page 22)
- Attachment point for kill cord or VHF leash
- Webbing end tidy

Inflation System

UML Mk5 + Mk5i firing cap - Water sensitive activation system which uses a compressed paper capsule (see page 32)

Part No.	Description
DW-LTH/A	Deckvest LITE+, Black
DW-SHD/170-F	Deckvest LITE+ sprayhood
DW-PYL/L1-F	Pylon™ Lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MAK-F	UML Manual Conversion Kit Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted

OPTIONAL FITTING	
- Pylon™ Lifejacket Light	
- Lume-On™ Bladder Illumination Lights	
- Sprayhood	
- AIS MOB1 Unit	

	Black
---	-------

CE Approved	ISO12402-3 Lifejacket
	ISO12401 Deck Harness

DECKVEST CENTO

Junior Lifejacket Harness



Target Users

For Junior sailors aged approximately 7 to 15 years old, weighing 20-50kgs.

Features

Junior 150N Category Lifejacket Harness (100N actual buoyancy)

20-50kgs person weight

Compact and lightweight with form fitting shape

Soft loop harness attachment point

Lightweight easy adjust belt

Single Crotch Strap

Automatic inflation – UML Mk 5

Attachment for optional Pylon™ Light (see page 20)

Attachment for optional sprayhood (see page 30)

Through Life Support (TLS) Registration extends product warranty to 5 years



Part No.	Description
DW-CEN/APB	Deckvest Cento, Pacific Blue
DW-CEN/AGP	Deckvest Cento, Grenadine Pink
DW-SHD/100-F	Cento sprayhood
DW-PYL/L1-F	Pylon™ lifejacket light
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MAK-F	UML Manual Conversion Kit Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted

- OPTIONAL FITTING**
- Pylon™ Lifejacket Light
 - Lume-On™ Bladder Illumination Lights
 - Sprayhood
 - AIS MOB1 Unit



CE Approved ISO12402-3
ISO12401 Harness

DECKVEST LIFE

ULTRA LIGHTWEIGHT LIFEJACKET



DECKVEST CENTO

JUNIOR LIFEJACKET HARNESS



DECKVEST LITE USCG

Ultra light Lifejacket



Target Users

Ideal for fastcraft, RIBs, power and sail boating, paddle sport, fishing and open powercraft. Built for lightness and speed.

Features

- 170N (38lbs) buoyancy
- Ultra lightweight, low profile design with easy side donning
- One size
- Straps with soft rear moulding reduces twisting and aids adjustment
- Single crotch strap with recessed clip reduces risk of snagging
- Clipping area for PLB / VHF
- Boat name / branded printing available
- Attachment point for Chest Pack (see page 22)
- Attachment for kill cord or VHF leash

- Attachment point for optional sprayhood (see page 30)
- Recessed belt buckle and webbing end tidy
- Back adjuster for improved fit
- Automatic inflation – UML Mk 5
- Note: For lifejacket with harness specify Deckvest 5D
- Through Life Support (TLS) Registration extends product warranty to 5 years

Inflation System

(See page 32 for Inflation Systems)

USCG approved model: Halkey Roberts Alpha Inflator – Water sensitive activation system that uses a compressed powder bobbin

- OPTIONAL FITTING**
- Pylon™ Lifejacket Light
 - Lume-On™ Bladder Illumination Lights
 - Sprayhood
 - AIS MOB1 Unit



	Black		Tropic White
	Pacific Blue		Flow Green
	Grenadine Pink		

USCG – Type 5 with Type 2 Performance




USCG

Part No.	Description
DW-LCG/R	Deckvest LITE USCG, Black
DW-LCG/RPB	Deckvest LITE USCG, Pacific Blue
DW-LCG/RTW	Deckvest LITE USCG, Tropic White
DW-LCG/RGP	Deckvest LITE USCG, Grenadine Pink
DW-FCG/R	Deckvest LITE USCG, Flow Green
DW-SHD/170	LITE sprayhood
DW-PYL/L1	Pylon lifejacket light
DW-PMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MAK-F	UML Manual Conversion Kit Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted

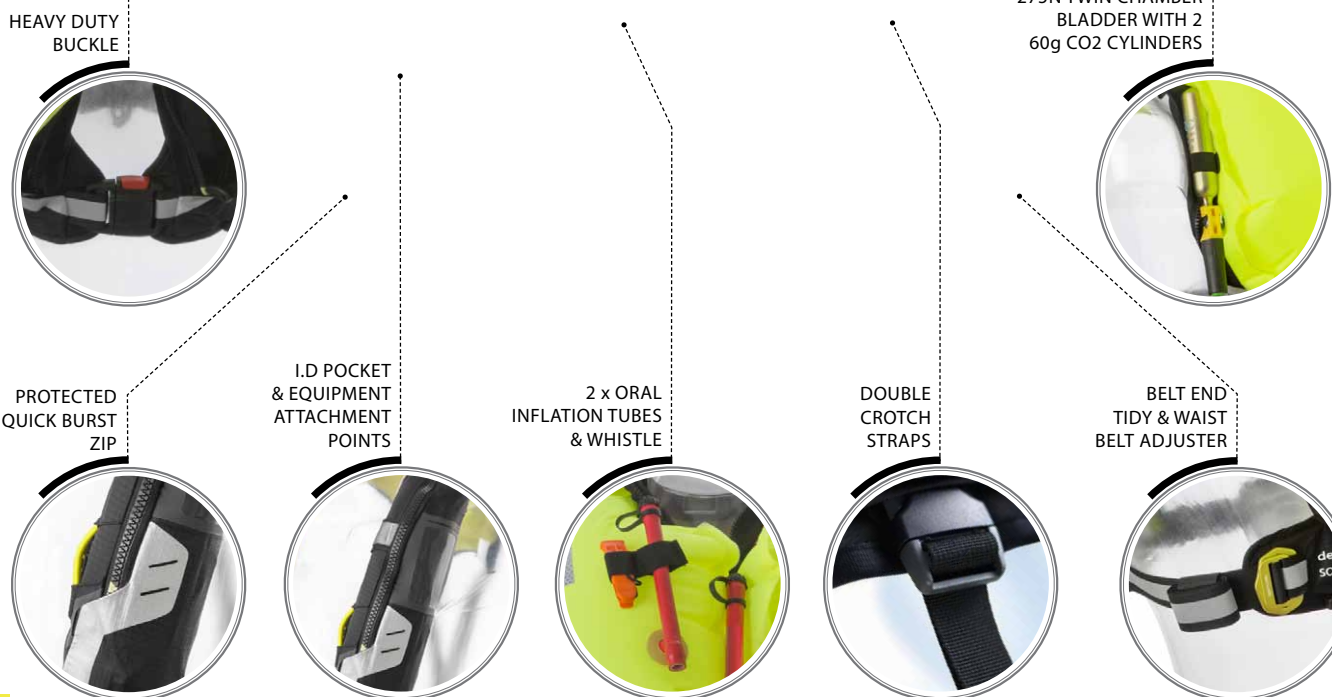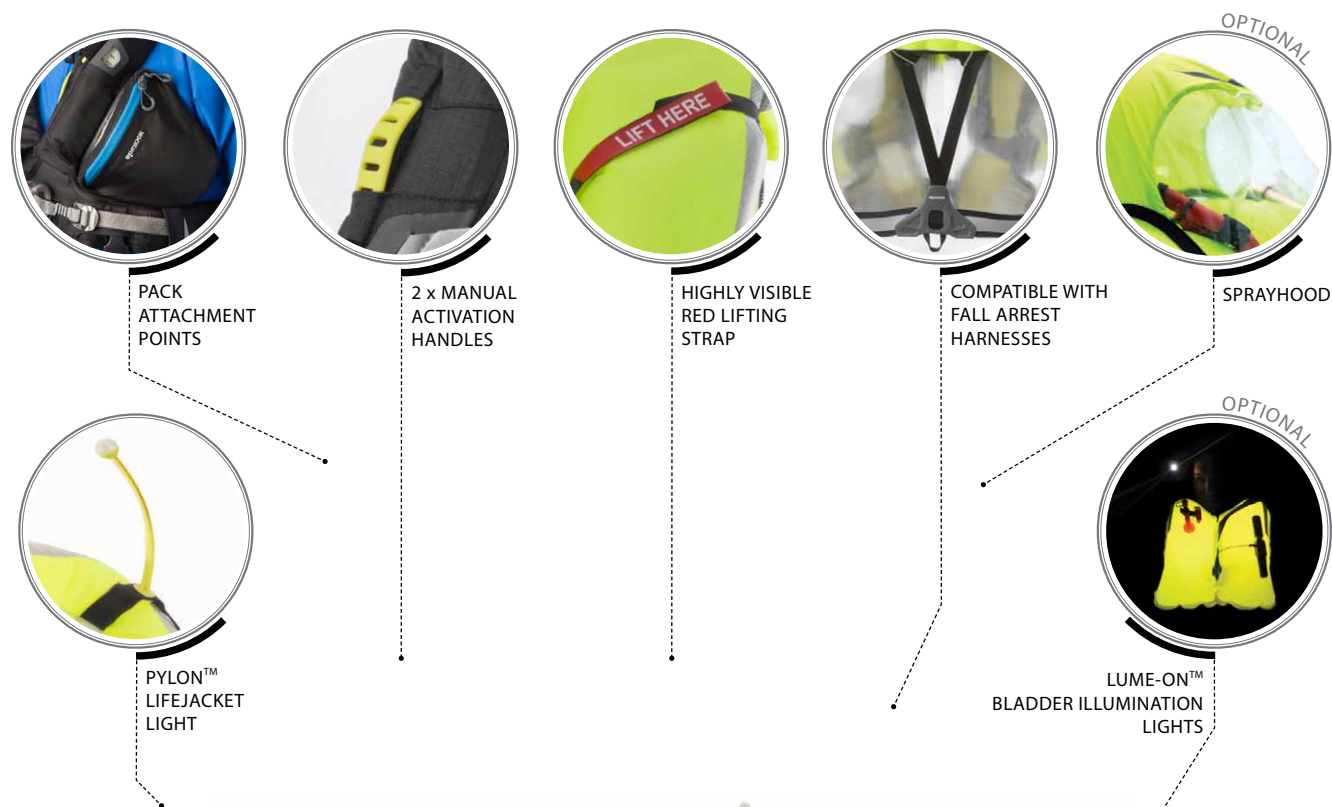

DECKVEST SOLAS 275N

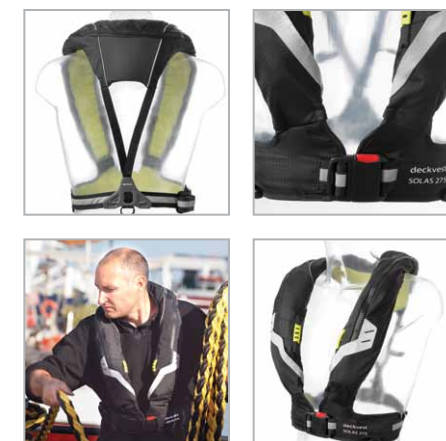

Target Users

Commercial Marine and people working on or near water who need to comply with SOLAS Regulation

Features

Approval to latest 2010 SOLAS standard

Structured shape and body for ultimate comfort and agility

Single Belt adjustment

Compatible with most fall-arrest harness models

275N Buoyancy – Twin chamber

Twin automatic inflation - UML Mk5

2 x 60g CO2 Cylinder

Unique bladder shape lifts and supports body higher when in water

Pylon™ Light - high intensity, water activated flashing LED light. 23cm flexible antenna wand gives improved light visibility above head and water. (See page 20 for more details)

Designed to be worn for extended periods of time in conjunction with other kit

Heavy duty zip closure with protective covers

Attachment point for optional sprayhood (see page 30)

Chest Pack attachment points (see page 22)

Floating 'Buddy Line'

Double crotch strap

Boat name/branded printing available

Part No.	Description
DW-SLS/A	Deckvest SOLAS, Black
DW-SHD/SLS-F	Deckvest SOLAS Sprayhood Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted
DW-LMN-F	Lume-On™ - Lifejacket Bladder Illumination x 2 Fitted
DW-TEC-F	Pro-Tech Protective Cover Fitted

OPTIONAL FITTING

- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 Unit
- Pro-Tech Protective Cover

 Black

CE Approved ISO12402-2 Lifejacket
2010 SOLAS MSC200 (80)


DECKVEST DURO

DURABLE LIGHTWEIGHT LIFEJACKET



DECKVEST DURO

Compact 170N/275N Workwear Lifejacket

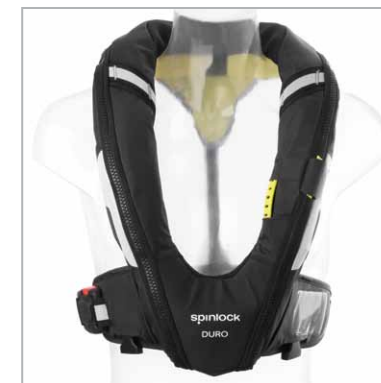

Target Users

Commercial Marine and people working on or near water.

Features

Designed to withstand the demands of tough environments

170N and 275N Versions (38lbs and 62lbs) buoyancy

Extra durable cover materials for a long life

Lightweight, low profile, compact design with easy side donning

One size

Straps with soft rear moulding reduces twisting and aids adjustment

Double crotch strap with recessed clip reduces risk of snagging

Clipping area for PLB / VHF

Clear pocket for identification card

Boat name/branded printing available

Attachment point for optional sprayhood (see page 30)

Attachment point for Chest Pack (see page 22)

Attachment for kill cord or VHF leash

Automatic inflation – UML Mk 5

Inflation System

UML Mk5 or Pro Sensor - Water sensitive activation system which uses a compressed paper capsule

Customisable Specification

Part No.	Description
DW-LTD/A170	Deckvest DURO 170N, Black
DW-LTD/A275	Deckvest DURO 275N, Black
DW-MAK-F	UML Manual Conversion Kit Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted
DW-PY/L1-F	Pylon Lifejacket Light Fitted
DW-LMN-F	Lume-On™ Lifejacket Bladder Illumination x 2 Fitted
DW-SHD/170-F	Deckvest DURO Sprayhood Fitted, 170N
DW-SHD/275-F	Deckvest DURO Sprayhood Fitted, 275N
DW-TEC-F	Pro-Tech Protective Cover Fitted


OPTIONAL FITTING

- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 Unit
- Pro-Tech Protective Cover

Black

Fluorescent Orange

CE Approved ISO12402-3 170N Lifejacket
ISO12402-2 275N Lifejacket

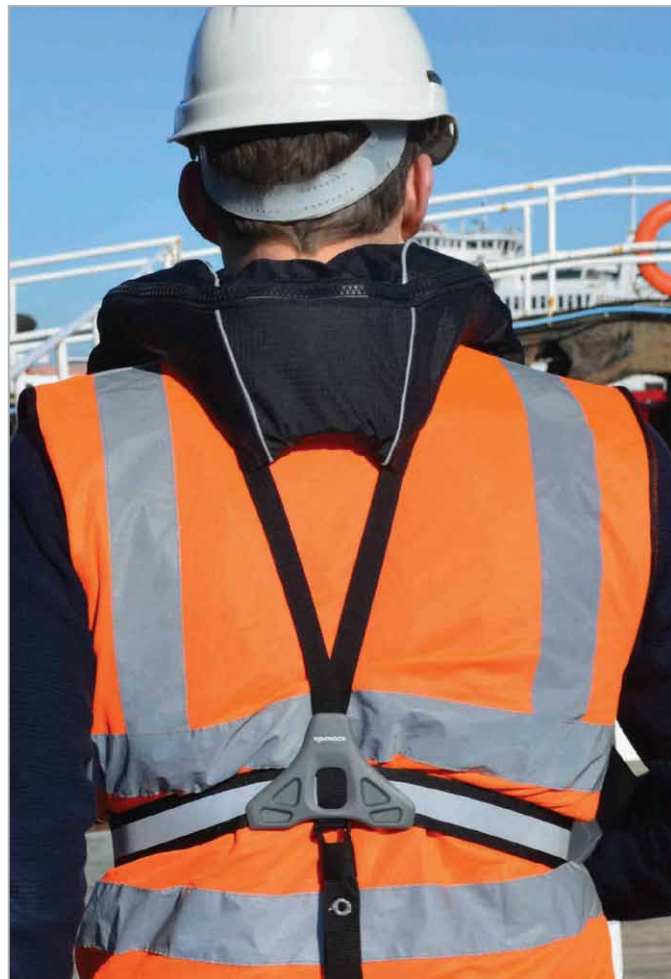

AIS MOB1

Integrated AIS MOB



HAMMAR FITTING

PRO SENSOR FITTING

AIS MOB device designed to fit & integrate in the Deckvest range

The new rescueME MOB1 personal AIS (Automatic Identification System) device is designed to be fitted to the complete Deckvest range and assist in Man Overboard recovery

The rescueME MOB1 can be supplied integrated and installed ready to use in your Deckvest lifejacket

Features

Designed to be fully integrated into the lifejacket system

The most compact AIS Unit on the market – up to 30% smaller

Slim, lightweight & streamlined

AIS unit deploys automatically on lifejacket inflation

Integrated strobe light for maximum visibility

7 year battery life

24+ hour operational life

5 year warranty

Supplied integrated and installed ready to use

Once activated your MOB1 will transmit an alert to all AIS receivers and AIS enabled plotters in the vicinity. The integrated GPS ensures precise location is sent to your vessel and any others that may be assisting

An additional feature of the MOB1, is its ability to activate the DSC alarm on your vessel's VHF

Full details of MOB1 available at www.oceansignal.com

LUME-ON™

Lifejacket bladder illumination



Target Users

All lifejacket users

Features

2 flashing LED Lights (pair) illuminate the inflated lifejacket bladder to increase visibility and aid location

Water activated - waterproof (IP68)

Uses the inflated lifejacket bladder as diffuser to increase visibility

Compact design

Attaches and integrates only in lifejackets with separate bladder and cover construction. Sticks directly to underside of inflatable chamber

Retail packaged as a pair of lights with stickers

Standard feature on Deckvest 5D

Multiple award winning product; including DAME design award 2015

Part No.	Description
DW-LMN	Lume-On™ - Lifejacket Bladder Illumination x 2



PYLON™

Lifejacket light for complete all-round visibility



Target Users

All lifejacket users

Features

High visibility LED light

Battery life indicator

Compact, easily attachable lifejacket light

Raised 23cm antenna light significantly improves 360 degree visibility

Retrofits to other inflatable lifejackets with included elasticated strap

Water activated with on/off switch

5 year shelf life

Standard feature on Deckvest 5D

Part No.	Description
DW-PY/L1	1 Single retail unit

Approvals
Latest SOLAS and Marine Equipment Directive

SAFETY LINES

For your lifejacket harness



Target Users

All Deckvest 5D, LITE+, Deck Pro Harness and Deckvest CENTO owners and all other lifejacket harness owners

Features

Up to 50% lighter and much more compact than conventional lines

Full strength, compact 18mm webbing - dry coated to reduce water absorption

Lighter weight safety clips

Overload indicator

ISAF/ ORC compliant

Part No.	Description
DW-STR/02	Double clip
DW-STR/02E	Double clip, stretch
DW-STR/03	Triple clip, stretch
DW-STR/2LE	Single clip, loop, stretch
DW-STR/3L	Double clip, loop, stretch

Clip / Connect	
Double clip DW-STR/2L	
Double clip, stretch DW-STR/02E	
Triple clip, stretch DW-STR/03	

Cow Hitch / Connect	
Single clip, loop, stretch DW-STR/2LE	
Double clip, loop, stretch DW-STR/3L	

CE Approved	ISO12401
-------------	----------

SAFETY LINE CUTTER

Emergency release



Features

Fast escape accessory for cutting a safety line under load

420 stainless steel blade - wax covered for protection

Meets ISAF and ORC recommendations

Provides the best protection against the risk of safety line clips becoming unreleasable

Standard feature on Deckvest 5D

Part No.	Description
DW-CTR	Safety Line Cutter

PACKS

For all your boating essentials



CHEST PACK



DW-PCC

Smallest pack - suitable for personal essentials
Lightly padded with structured two way zip for easy access
Lanyard attachment and key clip for security
‘Toggle Fits’ to Deckvest 5D, LITE, LITE+, CENTO, DURO, SOLAS (2014 only) in chest position, left hand side
Fits to any belt with secure double fold hook and loop attachment
Self-draining

BELT PACK



DW-PCB

Mid size pack - suitable for daily essentials
Lightly padded with structured two way zip for easy access
Lanyard attachment and key clip for security
Clear panel window
Fits to any belt with secure double fold hook and loop attachment
Self-draining

SIDE PACK



DW-PCS

Mid size pack - suitable for daily essentials
Secure water bottle holder - includes 380ml bottle
Lightly padded with structured two way zip for easy access
Lanyard attachment and key clip for security
Fits to any belt with secure double fold hook and loop attachment
Self-draining

TOOL PACK



DW-PCT

Heavy duty soft tool bucket for carrying large items aloft
Big enough for power tools, hammers and range of hand tools
Hard wearing PU coated fabric
3 large pockets
Internal pocket for small items
Lash points for tool security

DECKPACK

27 litre lightweight backpack



DW-DBG

Features
Lightweight backpack for stashing the day's essentials
Quick access pocket, bottle pocket, laptop sleeve and name patch
Volume - 27 litres

DECK PRO

Revolutionary Deck Safety Harness



Target Users
Ideal for sailors who prefer to be ‘clipped on’ when sailing

Features
Ultra lightweight and comfortable design
Easy to fit with quick adjust ‘double back’ twin buckles in marine grade stainless steel
Soft loop tether attachment in high tensile webbing
Shoulder straps shaped towards the centre of the chest, for exceptional comfort and freedom of movement
‘S’ Cutter accessory pocket (see page 21)
Chest size adjustment 72-128cm (29-49”)

Part No.	Description
DW-DPH	Deck Pro



CE approved ISO 12401

KNEE PADS

Performance knee protection



DW-DPH

Features
Impact protection for sailing and other watersports
High density moulded foam provides patella support and protection
Extra tough outer fabric protection
Breathable Neoprene panelling for added comfort
Ergonomically shaped to maintain position and prevent slipping
Low volume back panelling prevents bulking
Available in 2 sizes (see page 33)

Part No.	Description
DW-KPD	Kneepads - Small/Medium
DW-KPD/L	Kneepads - Large



MAST PRO

Generation mast harness



DW-MPH

Part No.	Description
DW-MPH	Mast Pro Harness

Cobalt Blue


CE Approved
0120 Type C - EN12277

Target Users

All working at height on board a yacht or powerboat

Features

- Re-engineered
- Extremely lightweight minimal design
- Super slim, structured waist belt spreads the load evenly over its full width, for comfort with reduced bulk
- Unique Ratchet-Fit™ adjustment on leg straps for a secure, easy fit
- Ergonomic sculptured waist belt and super wide leg straps for added comfort and lumbar support
- Designed for use in the marine environment
- Marine grade stainless steel 'double-back' buckles
- Tripping spike pocket - accessible from both sides
- User replaceable leg strap elastics
- Tool attachment points
- Spinlock FID tripping spike available

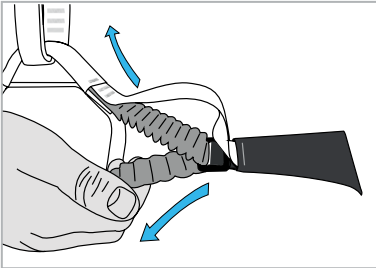

Ratchet Fit™ leg adjustment



TRIPPING SPIKE

Quick snap shackle release



DW-FID

Features

- Improved fid design with shackle key for sizes 5-14mm
- Sized for snap shackles up to Tylaska T20
- Machined in hard anodised alloy
- Knurled hand grip designed for safe control at high loads
- Lanyard attachment hole
- Shackle pin key slot

MAST PRO

MAST CLIMBING HARNESS



WING & FOIL

50N high agility flotation PFD



Target Users

Ideal for dinghies, keelboats, RIBs and watersports

Features

- 50N buoyancy
- Low profile with low snag body fit system
- Tapered high cut for action and mobility
- Internal 'GRIP' print
- Front and side zip versions
- Stretch mesh outer pocket with internal security pocket (WING)
- Two stretch mesh front pockets (FOIL)
- Articulated back panelling (FOIL)
- Dry coated elastic side panels to reduce water absorption
- Available in sizes S, M, L & XL
- WING available in XS

Black Graphite

Cobalt Blue

Mercury Red



Part No.	Description
DW-BA/F1BG	Size S, FOIL PFD, Front ZIP, Black Graphite
DW-BA/F2BG	Size M, FOIL PFD, Front ZIP, Black Graphite
DW-BA/F3BG	Size L, FOIL PFD, Front ZIP, Black Graphite
DW-BA/F4BG	Size XL, FOIL PFD, Front ZIP, Black Graphite
DW-BA/F1CB	Size S, FOIL PFD, Front ZIP, Cobalt Blue
DW-BA/F2CB	Size M, FOIL PFD, Front ZIP, Cobalt Blue
DW-BA/F3CB	Size L, FOIL PFD, Front ZIP, Cobalt Blue
DW-BA/F4CB	Size XL, FOIL PFD, Front ZIP, Cobalt Blue
DW-BA/F1MR	Size S, FOIL PFD, Front ZIP, Mercury Red
DW-BA/F2MR	Size M, FOIL PFD, Front ZIP, Mercury Red
DW-BA/F3MR	Size L, FOIL PFD, Front ZIP, Mercury Red
DW-BA/F4MR	Size XL, FOIL PFD, Front ZIP, Mercury Red
DW-BA/SMR	Size XS, WING PFD, Side ZIP, Black Graphite
DW-BA/S1BG	Size S, WING PFD, Side ZIP, Black Graphite
DW-BA/S2BG	Size M, WING PFD, Side ZIP, Black Graphite
DW-BA/S3BG	Size L, WING PFD, Side ZIP, Black Graphite
DW-BA/S4BG	Size XL, WING PFD, Side ZIP, Black Graphite
DW-BA/SMR	Size XS, WING PFD, Side ZIP, Cobalt Blue
DW-BA/S1CB	Size S, WING PFD, Side ZIP, Cobalt Blue
DW-BA/S2CB	Size M, WING PFD, Side ZIP, Cobalt Blue
DW-BA/S3CB	Size L, WING PFD, Side ZIP, Cobalt Blue
DW-BA/S4CB	Size XL, WING PFD, Side ZIP, Cobalt Blue
DW-BA/SMR	Size XS, WING PFD, Side ZIP, Mercury Red
DW-BA/S1MR	Size S, WING PFD, Side ZIP, Mercury Red
DW-BA/S2MR	Size M, WING PFD, Side ZIP, Mercury Red
DW-BA/S3MR	Size L, WING PFD, Side ZIP, Mercury Red
DW-BA/S4MR	Size XL, WING PFD, Side ZIP, Mercury Red
*Size XS only available in WING	
CE Approved ISO12402-5	



AERO PRO

Dynamic Body profiled 50N Flotation Vest



Target Users

For high agility dinghy, multihull and keelboat sailing

Features

- 50N Flotation vest for high agility sailing
- Durable high stretch woven construction for close fitting body
- Wrap around, close fitting neck collar
- Over length waist gaiter with trapeze hook opening
- Short sleeves
- Ultra flexible, high buoyancy soft foam
- High gloss cover finish to reduce wind and water resistance



- Airwave Technology for improved airflow
- Low profile stretch pocket
- Available in 3 sizes
- Access pocket for optional:
 - D3O® Impact Protection, Back Protector
 - or**
 - Hydration bladder with oral tube feed

Part No.	Description
DW-BAR/1	Aero Pro, size 1
DW-BAR/2	Aero Pro, size 2
DW-BAR/3	Aero Pro, size 3
DW-BBP	Aero Pro, Back protector, Small
DW-BBP/L	Aero Pro, Back protector, Medium Large
DW-HYB	Aero Pro, Hydration bladder

D3O® Impact Protection Back Protector

- D3O® patented technology
- Certified to exceed the performance requirements of EN1621-2:2014
- Ergonomic design for comfort and protection

Please note: No personal protection equipment can offer complete protection against all injuries. The user hereby agrees to absolve the manufacturer of all liability in respect of any personal injury

Black

CE Approved






50N Buoyancy ISO12402-5




AERO PRO 50N FLOTATION VEST



UPGRADES & SPARES

Deckware Series

PRODUCT	CODE	DESCRIPTION
	Lume On DW-LMN	Lume-On™ Lifejacket bladder illumination lights supplied fitted as standard to Deckvest 5D. Can be retrofitted to Deckvest LITE, LITE+, CENTO, SOLAS, DURO and most other brands of lifejacket.
	Pylon Light DW-PY/L1	Compact lifejacket light for complete all-round visibility. Fitted as standard to Deckvest 5D and Deckvest SOLAS. Can be retrofitted to Deckvest LITE, LITE+, CENTO, DURO and most other brands of lifejacket.
	Aero-Pro Back Protector DW-BBP	D3O® Impact Protection Back Protector. Certified to exceed the performance requirements of EN1621-2:2014. Fits inside Aero-Pro only.
	Aero-Pro Hydration Pack DW-HYB	Hydration pack. Fits inside Aero-Pro only.
	Deckvest LITE & LITE+ Sprayhood Deckvest CENTO Sprayhood Deckvest SOLAS Sprayhood Deckvest DURO 170N Sprayhood Deckvest DURO 275N Sprayhood DW-SHD/170 DW-SHD/100 DW-SHD/SLS DW-SHD/170 DW-SHD/275	Retrofit Sprayhoods for Deckvest LITE, Deckvest LITE+, Deckvest CENTO Junior lifejacket harness, Deckvest SOLAS Twin Chamber 275N Lifejacket and Deckvest DURO Helps to reduce the risk of spray inhalation secondary drowning
	170N Re-arming kit 100N Re-arming kit 275N Re-arming kit DW-RAK DW-RAK/100 DW-RAK/275	UML Pro Sensor and UML Mk5 re-arming kits 20g, 33g or 60g CO2 cylinder and activation head for Deckvest 5D, Deckvest LITE+, Deckvest LITE, Deckvest CENTO, Deckvest DURO and Deckvest SOLAS Note: For Deckvest SOLAS, 2 x 60g cylinders may be required
	UML Mk5 Firing Head DW-UML5	UML Mk5 firing head only Suitable for: Deckvest 5D Pro Sensor, Deckvest LITE+, Deckvest LITE, Deckvest CENTO, Deckvest SOLAS
	Manual Conversion Kit DW-MAK	Contains a blanking cap and manual tag for converting UML inflation systems to manual from automatic
	Hammar Re-arming Kits DW-RAH/150 DW-RAH/275	Hammar Hydrostatic re-arming kit 33g or 60g CO2 cylinder, activation head and manual handle for Deckvest Hammar 170N and 275N

PRODUCT	CODE	DESCRIPTION
	CO2 Cylinders DW-CYD20 DW-CYD33 DW-CYD60	20g, 33g or 60g cylinders for 100N, 170N or 275N Pro-Sensor lifejackets
	Halkey Roberts Re-arming Kit DW-RAR/33G	Re-arming kit for Deckvest LITE USCG version only
	Deckvest Crotch Straps and Thigh Straps DW-DTS/5D2 DW-DTS/5D3 DW-DTS/D2 DW-DTS/D3 DW-DTS/L DTS-TGH 2007-2008 SG 2008 ZP	Legstraps for Deckvest 5D Size 2 2014 onwards and Deckvest SOLAS/ DURO Legstraps for Deckvest 5D Size 3 2014 onwards Crotch strap, 2009 – 2011 – Deckvest Lifejacket Harness Crotch strap, 2009 - 2011 - Deckvest Lifejacket Harness Crotch strap, 2012 onwards Thigh conversion kit for Deckvest 5D 2012 onwards DW-DTS/5D2 with DW-DTS/ADP DW-DTS/D2 with DW-DTS/ADP

FITTED ACCESSORIES

Spinlock Lifejacket Accessories can be ordered 'Fitted' to the Lifejacket and delivered to you.

These part codes have '-F' at the end of the standard part number. An example is below:

DW-PY/L1-F
Fitted - Pylon Lifejacket Light

If, for example, you wished to order a Cento Deckvest with a Pylon light you would order:

1 x DW-CEN/AGP
Deckvest Cento Junior 100N Lifejacket Harness (Grenadine Pink)

1 x DW-PY/L1-F
Fitted - Pylon Lifejacket Light

Below is a list of the current '-F' part codes which will be included in your 2018 price lists:

DW-CTR-F	Fitted - Safety Line Cutter
DW-LMN-F	Fitted - Lume-On™ Bladder Light x 2
DW-MAK-F	Fitted - UML Manual Conversion Kit
DW-MOB/1-F	Fitted - Ocean Signal MOB1 Unit
DW-PCB-F	Fitted - Belt Pack
DW-PCC-F	Fitted - Chest Pack
DW-PCS-F	Fitted - Side Pack
DW-PY/L1-F	Fitted - Pylon Life Jacket Light
DW-RMAK-F	Fitted - Halkey Roberts Manual Conversion Kit
DW-SHD/100-F	Fitted - Deckvest CENTO Sprayhood
DW-SHD/170	Fitted - Sprayhood 170N accessory for Deckvest 5D, Lite or Duro
DW-SHD/170-F	Fitted - Sprayhood 170N fitted for Deckvest Lite or Duro
DW-SHD/275	Fitted - Sprayhood 275N accessory for Deckvest 5D or Duro
DW-SHD/275-F	Fitted - Sprayhood 275N fitted for Duro
DW-SHD/SLS-F	Fitted - Deckvest SOLAS Sprayhood

INFLATION SYSTEMS



UML Pro Sensor Inflator



UML Mk5 Inflator



Halkey Roberts Inflator



Hammar MA1 Inflator

UML Pro Sensor Inflator or Mk5 Inflator head for lifejacket models: Deckvest Pro Sensor 170N / 275N, LITE, LITE+, SOLAS, DURO & CENTO

Uses a compressed paper capsule that dissolves in water releasing a spring to puncture the gas cylinder. (Pro Sensor indicators show status of cap and cylinder).

The cap is designed so that only water flowing upwards through the unit will cause it to activate. Water, spray and rain running downwards will not cause activation.

Benefits

Very reliable

Easy to check and re-arm

3 year replacement date printed on firing cap

UML Rearming kits are inexpensive and stocked by most marine stores

Easy to convert to ‘manual firing’ only

Halkey Roberts Inflator Alpha (Deckvest LITE USCG only)

The Halkey Roberts Alpha Auto Inflator used with the USCG Approved Deckvest LITE uses a water soluble bobbin which activates the automatic inflation system.

Benefits

Very reliable

Easy to check and re-arm

Service life 3 years from date printed on bobbin

Rearming kits are inexpensive and stocked by most marine stores

Easy to convert to ‘manual firing’ only

Hammar MA1 Inflator head for Deckvest Hammar 170N

The Hammar system is activated by water pressure and will not inflate until the cap is approximately 10cm under water.

Benefits

Will not inflate accidentally in very wet conditions

Cylinder is glued to firing head so will not work loose

Cylinder is contained inside the bladder so will not corrode

Single indicator clearly shows if unit is armed

5 year expiry date printed on firing head

Considerations

More expensive rearming kit (more than double the cost of Pro Sensor kit)




Must use a Spinlock rearming kit as the manual handle is sewn into the head

More technical and more critical to rearm and repack

For reliable water access at 10cm depth, all air must be removed from the bladder. Air trapped in either the bladder during rearming or in the cover around the firing head can delay, or in extreme cases, prevent the head from activating


Delayed inflation can also be caused if full immersion of the firing head is delayed by buoyant foul weather gear

SIZE GUIDES

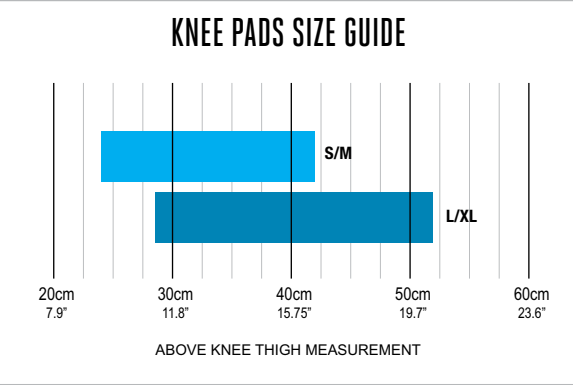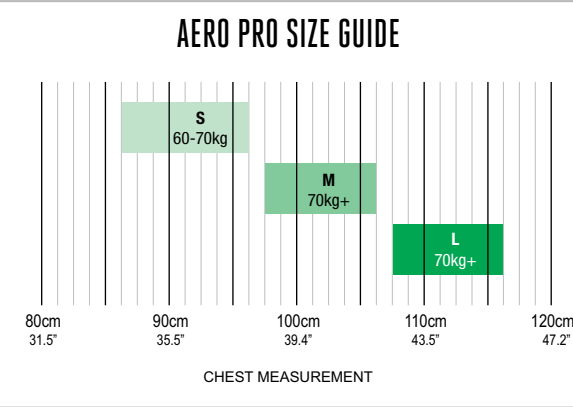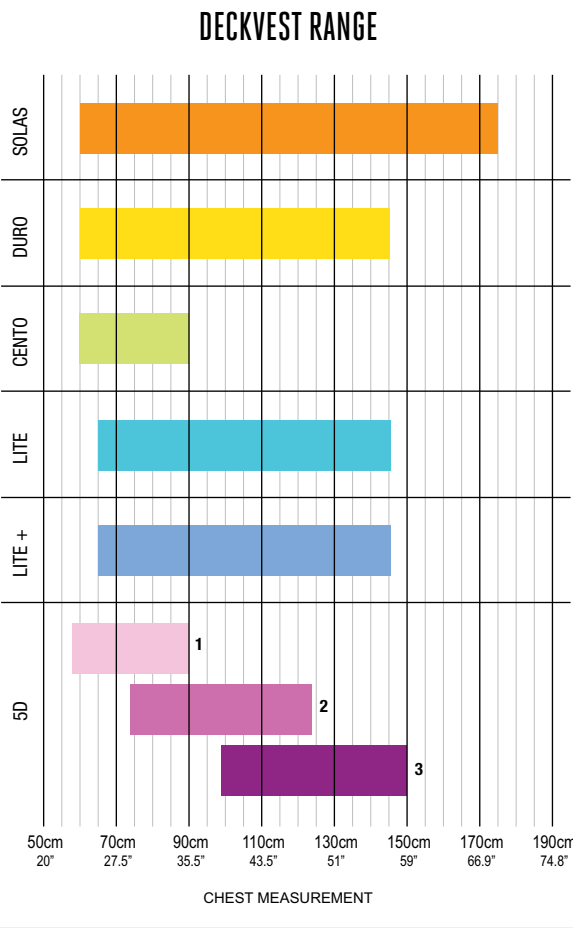

DECKWARE WEIGHTS


PAGE	PRODUCT	WEIGHT
6-7	Deckvest 5D Pro Sensor 170N	1310g (2lb 14.2oz)
6-7	Deckvest 5D Hammar 170N	1320g (2lb 14.5oz)
6-7	Deckvest 5D Pro Sensor 275N	1600g (3lb 8.4oz)
8	Deckvest LITE	860g (1lb 14.3oz)
9	Deckvest LITE+	860g (1lb 14.3oz)
10	Deckvest CENTO	720g (1lb 9.4oz)
15	Deckvest SOLAS	2070g (4lb 9.0oz)
17	Deckvest DURO 170N	950g (2lb 1.5oz)
17	Deckvest DURO 275N	1250g (2lb 12.1oz)
20	Lume-On™	14g (0.5oz)
20	Pylon™ Light	37g (1.3oz)
21	Safety Lines	
	DW-STR/02	368g (13.0oz)
	DW-STR/03	530g (1lb 2.7oz)
	DW-STR/02E	366g (12.9oz)
	DW-STR/2LE	244g (8.6oz)
	DW-STR-3L	414g (14.6oz)
22	Chest Pack	83g (2.9oz)
22	Belt Pack	80g (2.8oz)
22	Side Pack	160g (5.6oz) (including bottle)
22	Tool Pack	440g (15.5oz)
23	Deck Pro	445g (15.6oz)
24	Mast Pro	581g (1lb 4.5oz)
26-27	WING	470g (1lb 0.6oz)
26-27	FOIL	470g (1lb 0.6oz)
28	Aero Pro	730g (1lb 9.7oz)
28	Back Protector	264g (9.3oz)

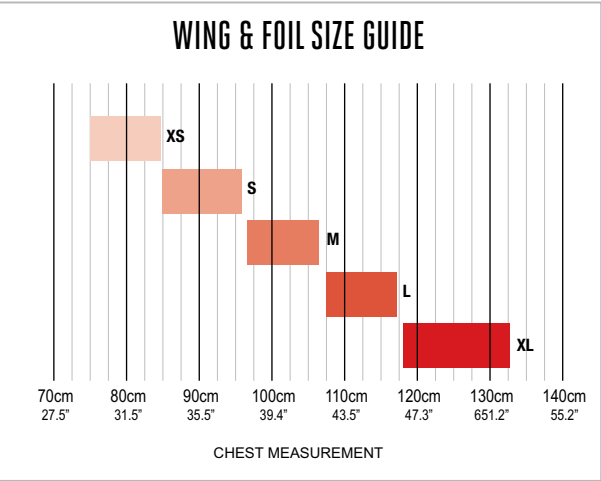

CELEBRATE LITTLE ADVENTURES



HARDWARE RANGE

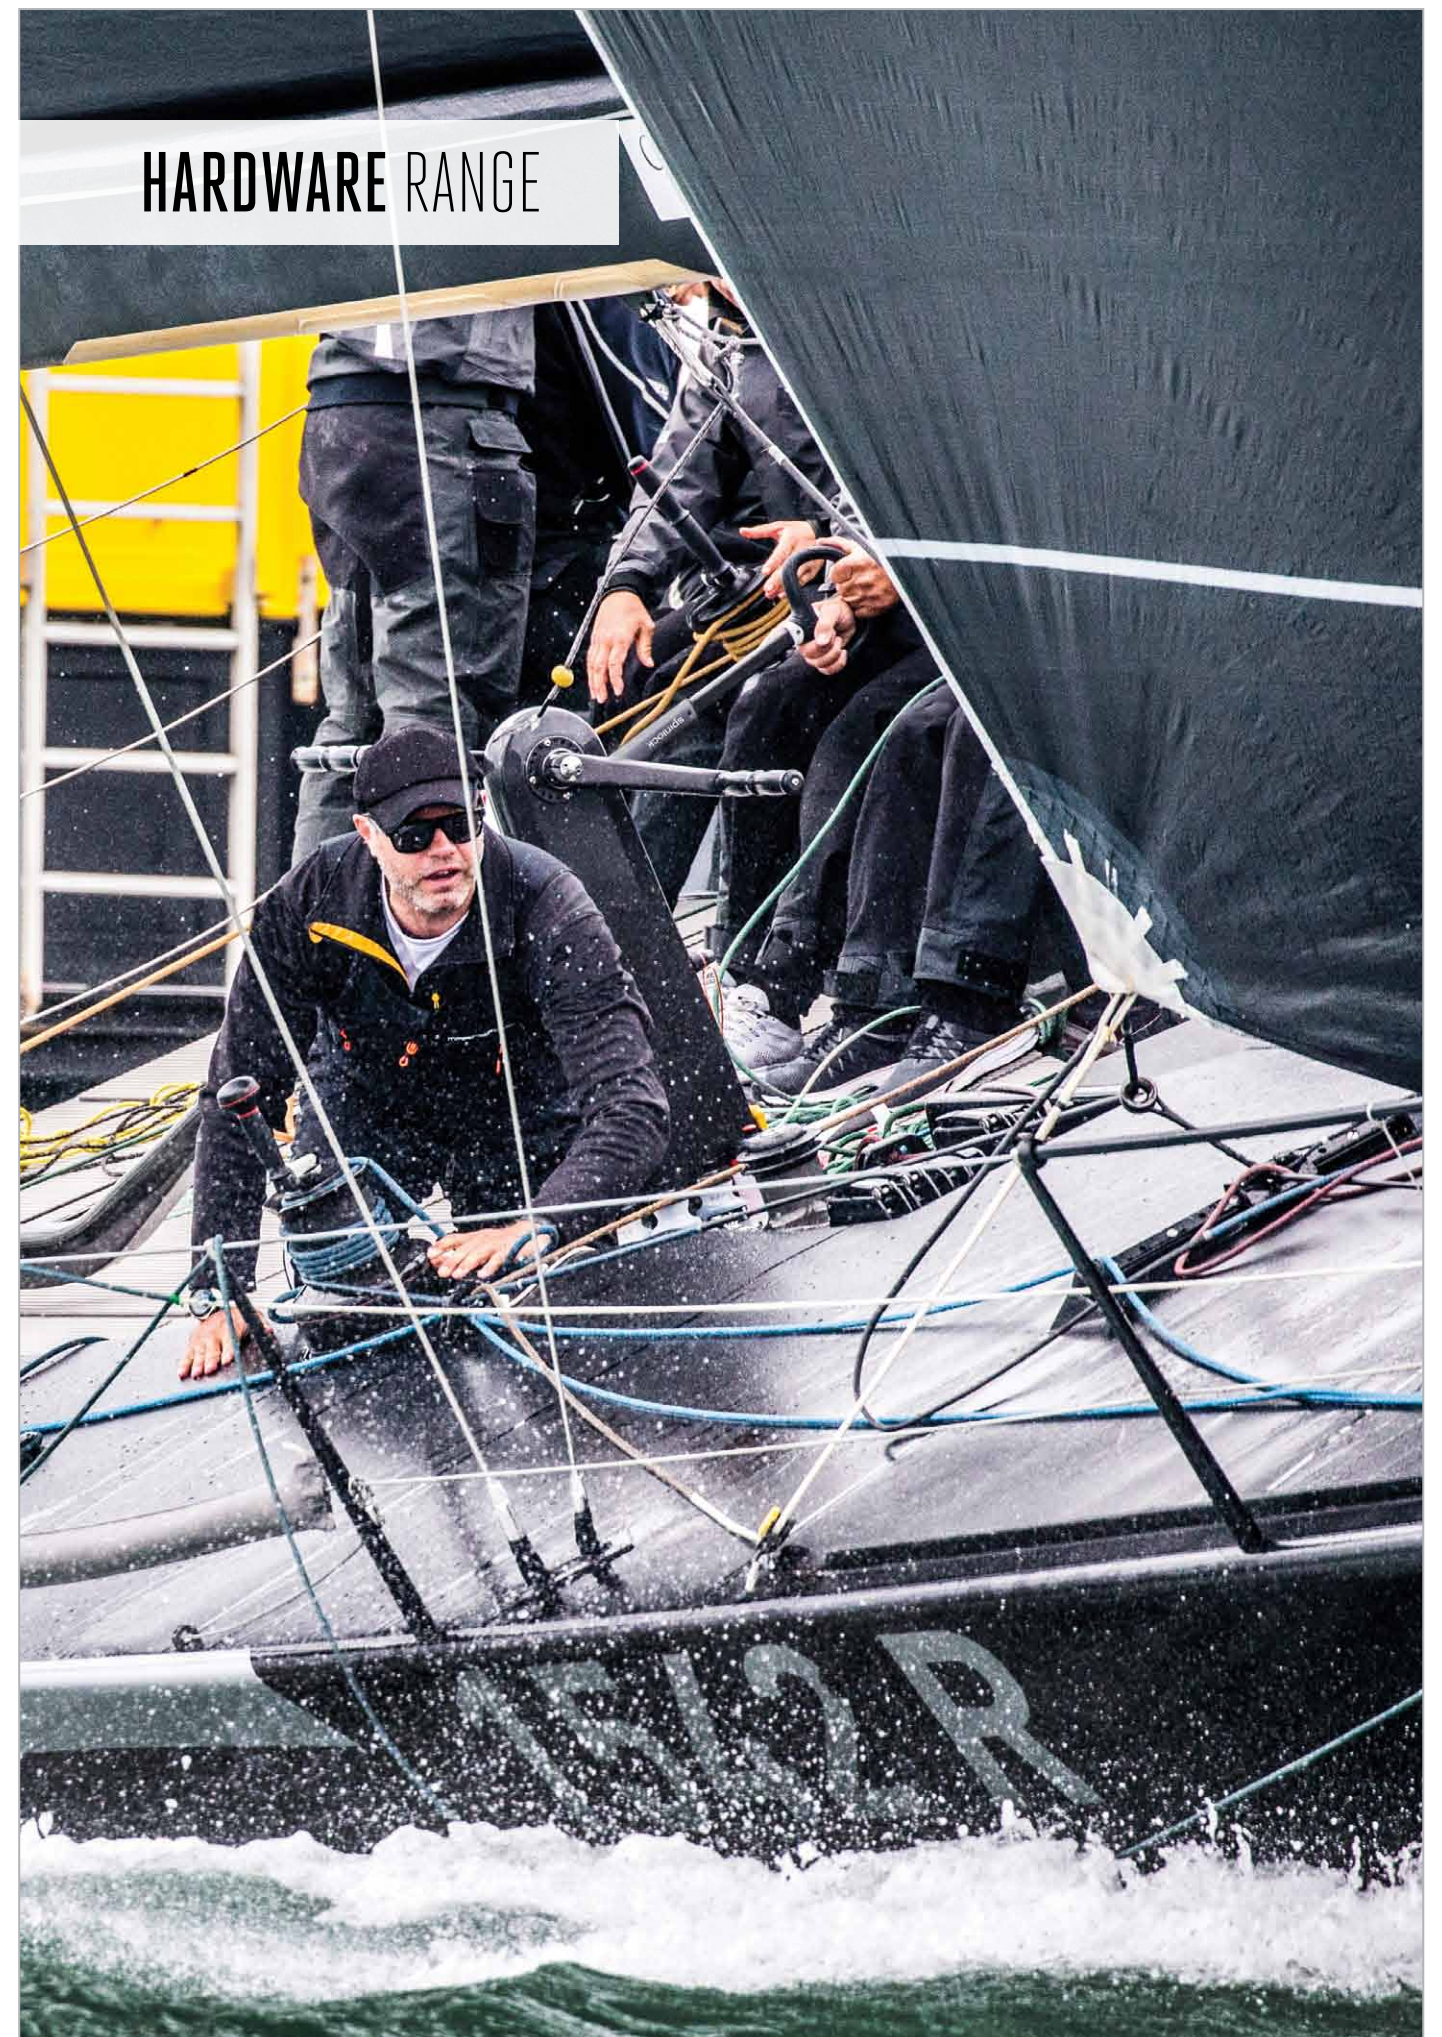

SENSE LOAD CELLS

Mobile Load Testing



LWS works with SENSE app

Simple, soft loop attachment offers fast connection to any application, for quick load measurement

Loads up to 20,000kg (44,092lbs)

Features

Actual loads often vary widely from design loads. Sense range offers teams the ability to quickly and easily confirm actual working loads, refine deck hardware, rope selection, sail choice and even sail trim.

Ultra compact and designed to be quickly attached between any two loaded points, be it a fibre rope or hardware.

Continuous real time 'Actual' and 'Peak' read out with trend graph.

Data displayed on either colour OLED Screen or via the latest Bluetooth LE, to a mobile device such as a smart phone, tablet or PC.

Peak Load displayed both during and after the session - recorded in the new LW-Sense mobile device app.

Overall accuracy 0.2% over full scale deflection.

Rated to IP67, protected against short term immersion in water.

Custom units rated up to 50 tonnes available.

Attachment loops available, ZS-LOOP/5 and ZS-LOOP/10.

Works with free LW-Sense and LD-Sense apps, (see page 37).

To discuss your requirements please contact: spt@spinlock.co.uk

Part No.	Description
LDS/5	Digital Sense with OLED display only, 5T maximum mobile load cell
LDS/10	Digital Sense with OLED display only, 10T maximum mobile load cell
LDS/20	Digital Sense with OLED display only, 20T maximum mobile load cell
LWS/5	Wireless Sense with Bluetooth connection only, 5T maximum mobile load cell (No Display)
LWS/10	Wireless Sense with Bluetooth connection only, 10T maximum mobile load cell (No Display)
LWS/20	Wireless Sense with Bluetooth connection only, 20T maximum mobile load cell (No Display)

RIG SENSE

Rig tension gauge for 2-5mm & 5-8mm wire and cable



Features

Rig Tension gauge for repeatable rig settings - aids race set up and preparation.

Measure and set loads on both wire and fibres.

Diameter range 2-5mm and 5-8mm.

Direct linear scale with tension output.

Composite calibrated leaf spring.

Stainless steel contact points.

Ergonomic robust body.

Compact size, durable and light.

Easy one handed operation.

Storage bag included.

Part No.	Description
RGS/0205	Rig Sense 2-5mm Wire/Fibre
RGS/0508	Rig Sense 5-8mm Wire/Fibre



FREE SPINLOCK APPS

The three Sense Apps allow users of Spinlock load measuring devices to work efficiently with their devices and store and manage their data in a single place.

Download all three Spinlock Apps from the Apple App Store or the Spinlock website.

Rig-Sense App – Using the Rig Sense, record data of critical settings to ensure repeatable race settings over differing conditions. Create templates to build settings, add images and share and export data for later analysis with your class.

LW-Sense App – Controls the Wireless Sense unit using a Bluetooth LE Connection and displays and records data. Allows tagging of the application detail, Geo- location, test conditions, add images and share and export data for later analysis.

LD-Sense App – Using LD-Sense OLED unit, record data from the logging session, such as the application detail, test conditions, add images and share and export data for later analysis.



PXR CAM CLEAT

The easiest cleat to release



Compact cam cleat for easy fast release of high performance controls and mainsheets under load

Lines 2 - 6mm (3/32 - 1/4")
Lines 8 - 10mm (5/16 - 3/8")

Loads up to 200kg (440lbs)

Features

- Fast precise control for hand tensioned lines
- Hard anodised alloy cam and base
- Ideal for high performance lines
- Micro size for small diameters
- Three stage release control switch
- Ideal for single line spinnaker hoist systems
- Resists accidental re-cleating
- Audible lock

Retrofit 'T'

Matched hole centres allow direct replacement of traditional cam cleats with PXR

PXR0206/T - 27mm (1 1/16") hole centres - for upgrading dinghy control line cam cleats

PXR0810/T - 38mm (1 1/2") hole centres - for upgrading main sheet swivel cleats and traveller systems on dinghies, keelboats and yachts. Also cam cleats on downhauls, vang and backstay controls



Deck Swivel 'SW'

PXR0206/SW for single cleat control of jib sheets and dinghy vangs


Preferred by dinghy builders for single line spinnaker hoist systems

PXR0810/SW for bigger boat swivel camcleat control applications

Same footprint as traditional swivel cam cleats



Rope Size Guide

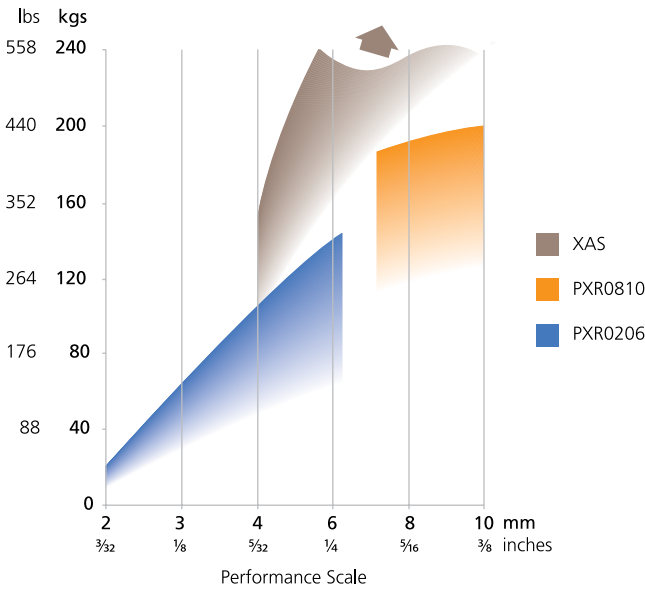

Model	Line Dia	SWL at max line dia	Break load	Weight
PXR0206	2-6mm (³ / ₃₂ - ¹ / ₄ ")	140kg (308lbs)	280kg (616lbs)	43g (1.5oz)
PXR0206/SW	2-6mm (³ / ₃₂ - ¹ / ₄ ")	140kg (308lbs)	280kg (616lbs)	77g (2.7oz)
PXR0206/VP	2-6mm (³ / ₃₂ - ¹ / ₄ ")	140kg (308lbs)	280kg (616lbs)	97g (3.4oz)
PXR0206/T	2-6mm (³ / ₃₂ - ¹ / ₄ ")	140kg (308lbs)	280kg (616lbs)	53g (1.9oz)
PXR0810	8-10mm (⁵ / ₁₆ - ³ / ₈ ")	200kg (440lbs)	400kg (880lbs)	84g (2.9oz)
PXR0810/SW	8-10mm (⁵ / ₁₆ - ³ / ₈ ")	200kg (440lbs)	400kg (880lbs)	124g (4.3oz)
PXR0810/T	8-10mm (⁵ / ₁₆ - ³ / ₈ ")	200kg (440lbs)	400kg (880lbs)	101g (3.5oz)

Centre Pivot 'VP'*

Pivoting sheave and cleat super compact design

Centrally - for feeding control lines out to the sides

Under boom - for outhaul and gnav (reverse vang) controls

At mast base - for catamaran downhauls and vangs

Easily detached

Accepts Harken sheave ref: H415

* Available for PXR0206 only



Mast Bracket

Mast bracket for PXR0206 and PXR0810

Hard black anodised

Fits mast sections on most dinghies and keelboats up to 24ft

PXR-BRACKET



XAS POWERCLUTCH

Effortless Multi Role Clutch



The perfect clutch for racing yachts up to 27' and cruising yachts up to 34'

Lines 4 - 12mm (5/32 - 1/2")

Loads up to 575kg (1270lbs)

Features

- Superb all round performance
- High strength, soft grip ergonomic handle
- Modular design: easy to upgrade & maintain
- Effortless release
- Line-friendly grip profile
- Excellent performance across the widest rope range
- High performance, small diameter version for 4-8mm lines
- Side-mountable on either side with fairing kit XAS-SMNT


Small Diameter High Load XAS0408

- Gives optimised clutching and holding power on small diameter lines
- 4 - 8mm (5/32" - 5/16"). Strongly recommended for sportsboat and other small boat high performance applications. Check rope size/ load graph
- Regular size XAS0612 may be converted for small diameters by using base module XAS-BASE0408

Continuous Line XAS/M

- Solves the problem of threading a continuous furling line
- These clutches are supplied as kits with open bullseyes to be assembled directly onto the line
- XAS0612/1M, XAS0612/2M, XAS0612/3M

Rope Size Guide

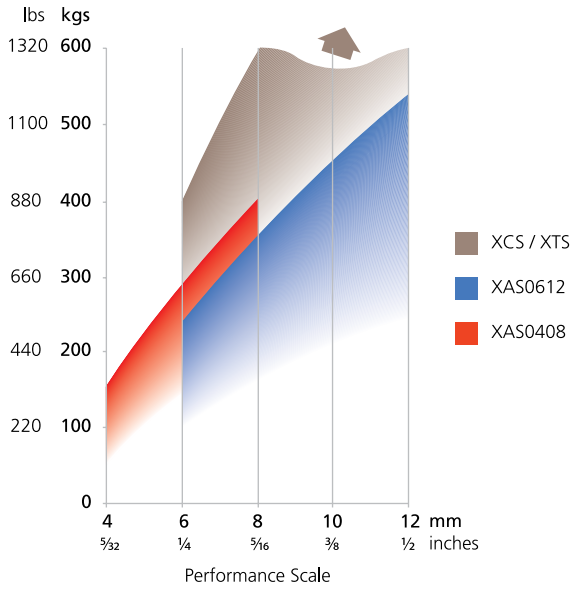

Model	Line Dia	SWL at max line diameter	Kit form for endless lines
XAS0612/1	6-12mm (1/4-1/2")	575kg (1270lbs)	XAS0612/1M
XAS0612/2	6-12mm (1/4-1/2")	575kg (1270lbs)	XAS0612/2M
XAS0612/3	6-12mm (1/4-1/2")	575kg (1270lbs)	-

Special Purpose Clutches

Model	Line Dia	SWL at max line diameter
XAS0408/1	4-8mm (5/32-5/16")	450kg (990lbs)
XAS0408/2	4-8mm (5/32-5/16")	450kg (990lbs)
XAS0408/3	4-8mm (5/32-5/16")	450kg (990lbs)

XAS Tips

Why a broad line size range is essential in your clutch

Lines often need to be switched or replaced, or smaller stronger lines fitted. A bank of clutches should never be specific to any one diameter or type of line

Leading Lines Aft

For best results with your XAS clutch installation, use model T38 deck organisers

Side Mounting an XAS

Side mounting is usually the neatest solution for spars, side decks, and coamings and is unique to Spinlock. XAS0612/HS, XAS0612/HP

To install a single XAS on its port or starboard side, simply use the fairing kit XAS-SMNT

XTS POWERCLUTCH

Mid / Higher Load Rope Holding




Specified as standard on larger production yachts worldwide and the choice of racing yachts inshore and offshore

Lines 6 - 14mm (1/4 - 9/16")

Loads up to 1000kg (2200lbs)

Rope Size Guide

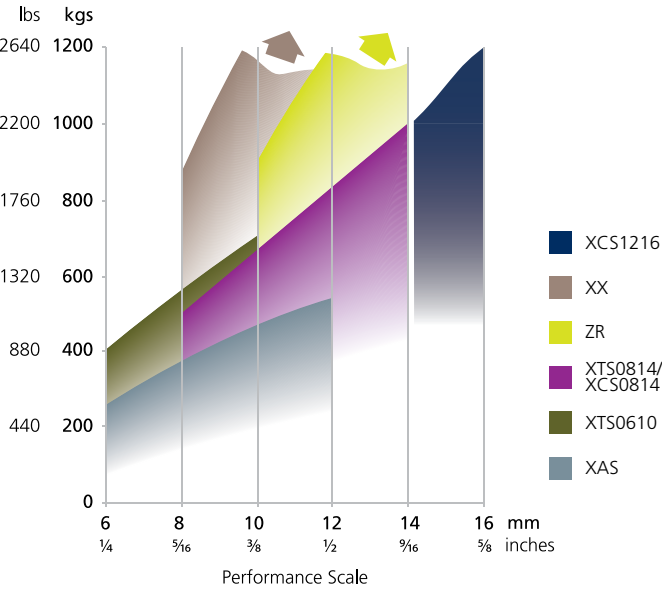

XCS POWERCLUTCH

Mid / Higher Load Rope Holding



The XCS offers a range of exceptional quality finishes to match your deck or rig

Lines 6 - 14mm (1/4 - 9/16")

Loads up to 1200kg (2640lbs)

XCS Special Purpose Clutches

Ceramic CAM and Base versions for consistent holding of modern performance lines

Large Diameter line version XCS1216

Small diameter line optimised versions XTS0610

Continuous Line version for assembly onto the line for endless line systems

Side Mounting versions for spars, side decks and coamings

Lock-Open Cam version. When the lock is engaged, the line is able to run freely in both directions until normal clutch function is needed

- White
- Black
- Silver



Features

XCS offers large diameter rope holding in a clutch

Aluminium sides for sustained high load operation

Available in white coated, black anodised or silver polished alloy to match deck, rig or other Spinlock hardware

Mirror polished stainless steel versions also available

Handle label set supplied



Stainless Steel Sided XCS/SS

Mirror polished stainless steel sided versions, available in single, double and triple. Popular with classic yachts to match extensive custom on deck stainless metal work

XCS0814/SS1, XCS0814/SS2, XCS0814/SS3

Model	Line Dia	SWL at max line diameter
XCS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0814/1	8-14mm (5/16-9/16")	1200kg (2640lbs)
XCS0814/2	8-14mm (5/16-9/16")	1200kg (2640lbs)
XCS0814/3	8-14mm (5/16-9/16")	1200kg (2640lbs)

For ceramic versions add 'C' to end of part code

XTR POWERCLUTCH

Mid / Higher Load Rope Holding



Smooth dual action, extra grip and release control, on deck servicing


Lines 8 - 12mm (5/6 - 1/2")

Loads up to 1000kg (2200lbs)

Features


- Superb mid load holding performance
- 'Reactive Clutching' - line holding is consistent and fast across the full diameter range - release is smooth and progressive
- Offers significant rope holding improvement on the latest small diameter rope types
- Ultra lightweight alloy/composite construction
- Handle lifts to ergonomic position for release
- Reactor cam module is easily removed for on deck cleaning and servicing
- Single units only
- Side mount versions available
- One-person installation

Rope Size Guide

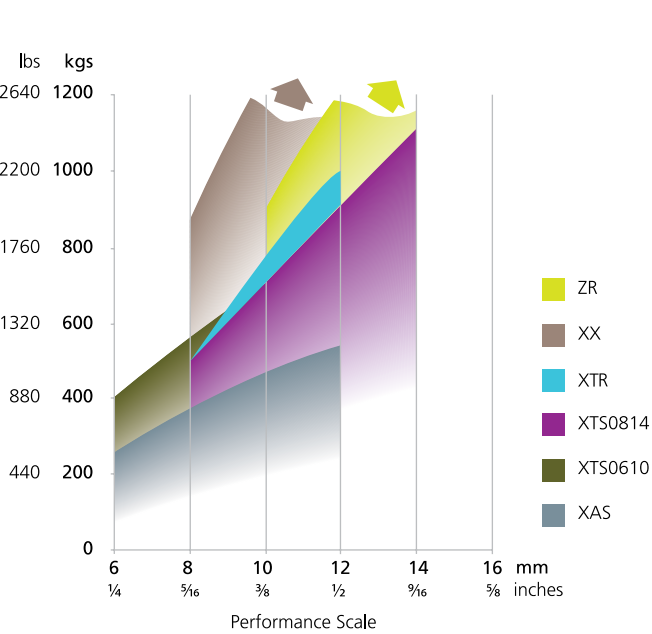

ZR JAMMER

Mid / Higher load Winch Release Jammer

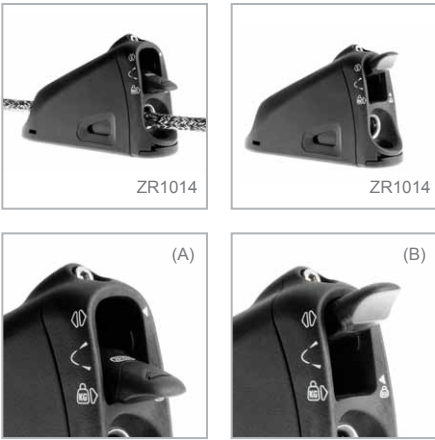

Secure 'hands free' jammer technology for production yachts


Lines 10 - 14mm (3/8 - 9/16")

Loads up to 1500kg (3300lbs)

Features

- Controlled release action: always safely from the winch
- Holds three line sizes 10mm, 12mm and 14mm
- Holds 50% more line load than XTS/XTR clutch
- ZR Jammer can be primed for release using the GRIP switch
- Easy access fastener holes
- High tensile fasteners (M8 x 60mm A4-70), nuts and washers supplied
- Replaceable jaw cartridge accessed with a single screw
- Self-sealing deck fastening
- Can be configured for remote use
- Footprint matched to XX allows simple upgrade for higher loads or release functionality
- Single units only

Rope Size Guide

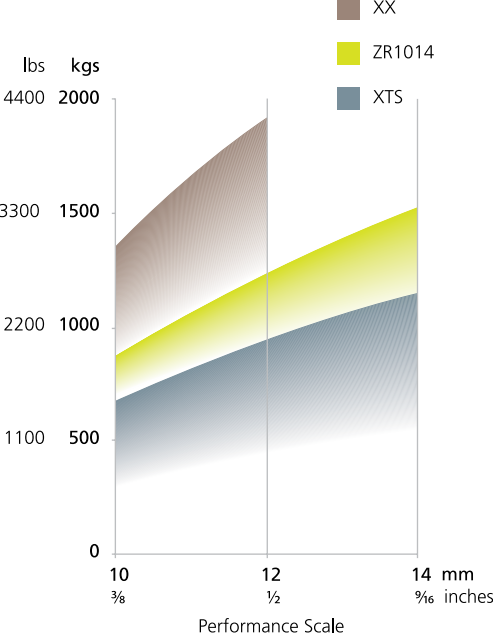

(A) ZR Grip Switch 'on'

One way 'Jamming' action: the loaded line cannot be released until primed and the load is taken on the winch

(B) ZR Grip Switch 'off'

Primed for winch release: jaws latch open the instant load transfers to the winch

Model	Line Dia	SWL at max line diameter
ZR1014	10-14mm (3/8-9/16")	1500kg (3300lbs)

XX SERIES - XXA, XXB & XXC POWERCLUTCH

Secure Clutching for High Loads



The only secure clutch solution for performance yachts

Lines 8 - 12mm (5/16 - 1/2")

XXA Loads up to 1800kg (3970lbs)
XXB Loads up to 2350kg (5180lbs)
XXC Loads up to 2350kg (5180lbs)

Features - XX Series

Latest jaw technology for consistent holding of performance ropes

Optimised for high performance 8-12mm (5/16-1/2") line diameters

Smooth controlled release action

One piece jaw set is easy to remove and clean

Access ports for fresh water flushing

Line height optimised for correct lead to winch and side mounting

Holds lines up to a massive 2350kg (5180lbs) working load

Side mount version

Ceramic jaws offer consistent holding of blended ropes and extended jaw life (XXB/XXC)

Internal Torlon roller bearings ensure lasting performance and durability under high loads (XXB/XXC)

Bonded version for building directly into deck or rig to save installed weight (XXC only)

Remote operation, handle free option

Lock Open feature allows lines to run through freely with handle closed, for applications such as mainsheets and spinnaker sheets

Allows structural integration and jammer style operation (release using winch)

Black or silver anodised (all models) or amber anodised (XXC only)

Custom finishes available

XX SERIES | ROPE HOLDING RANGE

	XXA	XXB	XXC
WEIGHT	1100kg	1100Kg	900Kg
MAX WORKING LOAD	1800Kg	2350Kg	2350Kg
ANODISED JAWS	✓	✗	✗
CERAMIC JAWS	✗	✓	✓
TORLON ROLLER UPGRADE	✗	✓	✓
TITANIUM COMPONENTS	✗	✗	✓
LIGHTWEIGHT MACHINED HANDLE	✗	✗	✓
ULTRA LIGHTWEIGHT MACHINED BODY	✗	✗	✓
UNIDIRECTIONAL CARBON REINFORCEMENT	✗	✗	✓
BONDED OPTION AVAILABLE	✗	✗	✓
BLACK ANODISED	✓	✓	✓
SILVER ANODISED	✓	✓	✓
AMBER ANODISED	✗	✗	✓



XXB0812 BLACK



XXB-KIT




XXC0812 BONDED



Part No.	Description
XXA	
XX0812	Black
XX0812/S	Silver
XX0812/HP	Black, Side Mount Port
XX0812/HS	Black, Side Mount Starboard
XX0812/L	Black, Lock Open
XX0812/R	Black, Remote
XX0812/LS	Silver, Lock Open
XX0812/RS	Silver, Remote
XXB	
XXB0812	Black
XXB0812/S	Silver
XXB0812/HP	Black, Side Mount Port
XXB0812/HS	Black, Side Mount
XXB0812/L	Black, Lock Open
XXB0812/R	Black, Remote
XXB0812/LS	Silver, Lock Open
XXB0812/RS	Silver, Remote
XXC	
XXC0812	Black
XXC0812/A	Amber
XXC0812/S	Silver
XXC0812/HBP	Black, Sidemount Port, Bonded
XXC0812/HBS	Black, Sidemount Starboard, Bonded
XXC0812/R	Black, Remote Operation ONLY (No Handle)
XXC0812/HP	Black, Sidemount Port, Bolted
XXC0812/HS	Black, Sidemount Starboard, Bolted
XXC0812/L	Black, Lock Open
XXC0812/R	Black, Remote

All XXA, XXB and XXC colour options and sidemount configurations are also available as lock open or remote variants, contact Spinlock for part codes.

Rope Size Guide

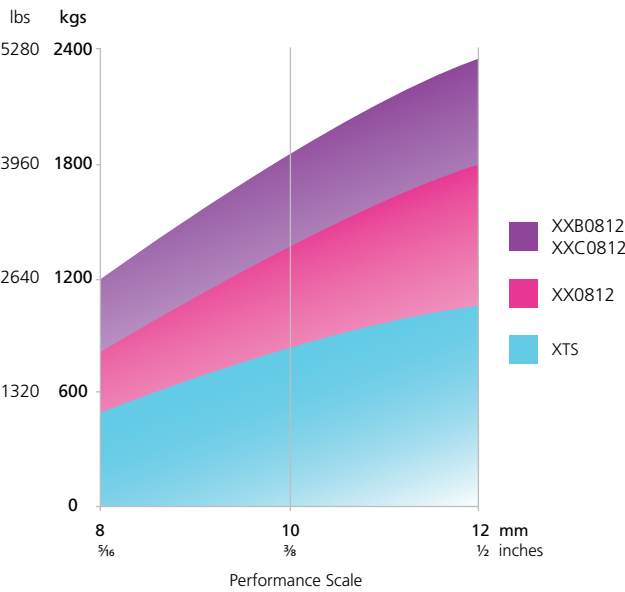


XX REMOTE RELEASE

- Black
- Silver
- Amber XXC Only

ZS ALLOY POWERJAMMER

Jammer for High Loads

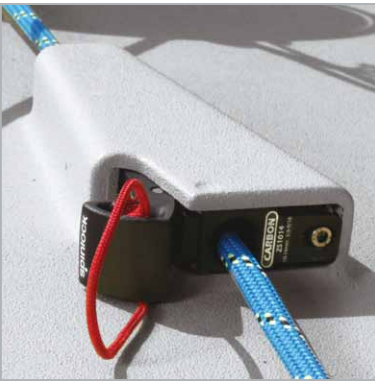

Unrivalled performance for larger diameters and high loads with the advantage of winch controlled release

Lines 8 - 18mm (5/16 - 11/16")

Loads up to 4000kg (8820lbs)

Features

Digitally modelled jaw surfaces hold high tech rope securely at its safe working load

Excellent performance on smaller diameter lines


Easy on deck service access

Carbon versions available with lightweight, super strength body

Side mount using existing holes in jammer body

Ceramic coated jaws option offers consistent holding of blended covered ropes

Rope Size Guide

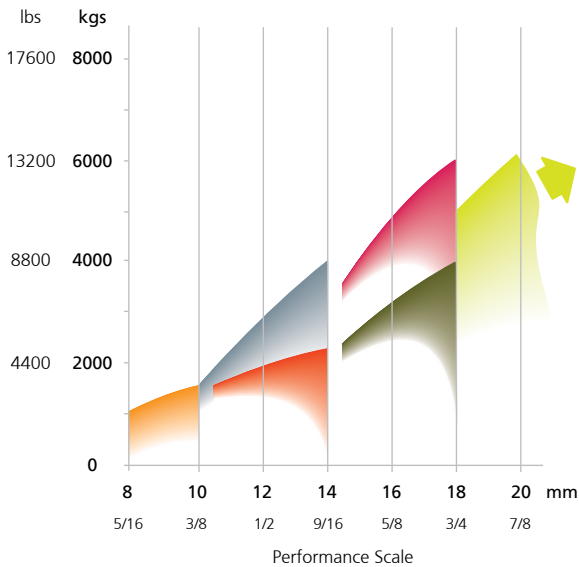

ZS1824 C	ZS1014 B/C
ZS1618 B/C	ZS1214
ZS1618	ZS0810



BONDED



HANDLE
PRINTING




CUSTOM FINISH

Model	Line Dia	SWL at max line dia	Weight
ZS0810	8-10mm (5/16-3/8")	1500kg (3310lbs)	750g (26.3oz)
ZS1214	12-14mm (1/2-9/16")	2200kg (4850lbs)	1190g (41.7oz)
ZS1618	16-18mm (5/8-1 1/16")	4000kg (8820lbs)	2025g (70.9oz)

ZS CARBON POWERJAMMER

Lightweight Jammer for High Loads

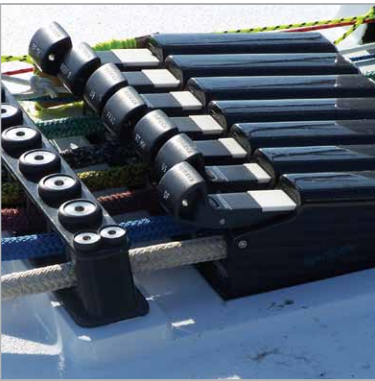

ZS Carbon Jammers for ultimate load holding and least product weight

Lines 10 - 32mm (3/8 - 1 1/4")

Loads up to 12,000kg (26,460lbs)

Features

ZS Carbon Jammers are supplied with high tensile fasteners for standard mounting. ZS Carbon Jammers can be vertically or side mounted on masts. Custom mounting plates are available for each jammer

Can be set up for remote operation using ZS-RLB (see page 50)

Supplied white painted as standard, custom finishes and unpainted product also available

ZS Bonded Series

Smaller and lighter than standard models, supplied unpainted for direct bonding. Applications include foredeck tack control lines and remote release locks, bonded to mast and booms

ZS 'P' Series Jaws

ZS Jammers are supplied as standard with 'P' Series Jaws which are for use with Dyneema core and polyester cover ropes and are generally used in ZS Alloy Jammers

ZS Ceramic 'HC' Series Jaws

Ceramic Jaws are especially designed for ropes with blended covers; polyester with high tech fibres such as Aramid, Technora, Codura or Vectran

ZS 'HC' Series Jaws have enhanced grip detail with ceramic coating to resist the polishing and wear caused by loaded rope at high line speed and allows faster engagement onto highly loaded line and improves load holding performance

Model	Line Dia	SWL at max line dia	Weight
ZS1014C	10-14mm (3/8-9/16")	4000kg (8820lbs)	1024g (36.2oz)
ZS1014B	10-14mm (3/8-9/16")	4000kg (8820lbs)	630g (22.2oz)
ZS1618C	16-18mm (5/8-1 1/16")	6000kg (13230lbs)	1390g (49.0oz)
ZS1618B	16-18mm (5/8-1 1/16")	6000kg (13230lbs)	910g (32.1oz)
ZS1824C	18-24mm (1 1/16-1 9/16")	8000kg (17640lbs)	2100g (73.5oz)
ZS2632C	26-32mm (1-1 1/4")	12000kg (26460lbs)	5100g (179.9oz)

ZS 'P' Series	For use in:
ZS-JAW08	ZS0810
ZS-JAW12	ZS1214 and ZS1014C
ZS-JAW16	ZS1618 and ZS1618C
ZS-JAW18	ZS1824C

ZS 'HC' Series	For use in:
ZS-JAW08HC	ZS0810
ZS-JAW12HC	ZS1214 and ZS1014C
ZS-JAW16HC	ZS1618 and ZS1618C
ZS-JAW18HC	ZS1824C

ZS-RLB REMOTE RELEASE

Remote operation of ZS Jammers



For use with ZS0810, ZS1214, ZS1014C and ZS1618 Jammers



Features

ZS-RLB Remote Release Switch

- 1. Lock - ZS-RLB switch in forward 'locking position' - the line is loaded or ready for load
- 2. Pre-set - with the line under load the ZS-RLB switch is rotated to the 'unlock' position - this pre-tensions the trip line ready for release
- 3. Fire - load on the line is taken on a winch and ZS Jaws spring to the open position. The load can now be released from the winch, to run freely through the ZS

For use with ZS0810, ZS1214, ZS1014C, ZS1618 and ZR Jammers, or existing halyard locks

Allows the jammer to be pre-tensioned to release automatically, when the load is taken on the winch

ZS1214, ZS1618, ZS1014C, ZS1618C, ZS1014B, ZS1618B and ZR Jammers are all supplied with jaws and rear block drilled for trip line attachment and lead

ZS OPEN POWERJAMMER

Mobile High Load Jammer



The essential solution for peeling spinnakers, headsails and reefing. Unbeatable in an emergency

Lines 8 - 32mm (5/16 - 1 1/4")

Loads up to 7800kg (17190lbs)



Features

Easily attached to any strong point with a strop

Hinged body can be opened and closed like a snatch-block

Acts as an emergency line clamp in case of winch or other hardware failure, jammed halyards, riding turns or damaged lines

Frees a winch for a sail change

Custom options include rig or deck mounting holes

Model	Line Dia	SWL at max line diameter
ZS0810/OPEN	8-10mm (5/16-3/8")	1200kg (2650lbs)
ZS1014/OPEN	10-14mm (3/8-9/16")	1800kg (3970lbs)
ZS1418/OPEN	14-18mm (9/16-11/16")	3200kg (7040lbs)
ZS1824/OPEN	18-24mm (11/16-15/16")	5200kg (11440lbs)
ZS2632/OPEN	26-32mm (1-11/4")	7800kg (17160lbs)

PD CARBON PADEYES


Strong Point



Features

- Carbon deck and backing plates
- High quality 17-4PH stainless steel
- Excellent strength to weight ratio
- Increased through laminate bearing surfaces to minimise tearing
- Significantly reduced weight to previous padeye range
- Improved shock loading resistance
- Compact foot print and the ability to 'nest' together
- Easily sealed

Part No.	SWL Vertical (kg)	SWL 45 (kg)	SWL Horizontal (kg)
PD/6C	2150	1290	1290
PD/8C	4000	2400	2400
PD/10C	7600	5250	5250
PD/12C	9750	6750	6750

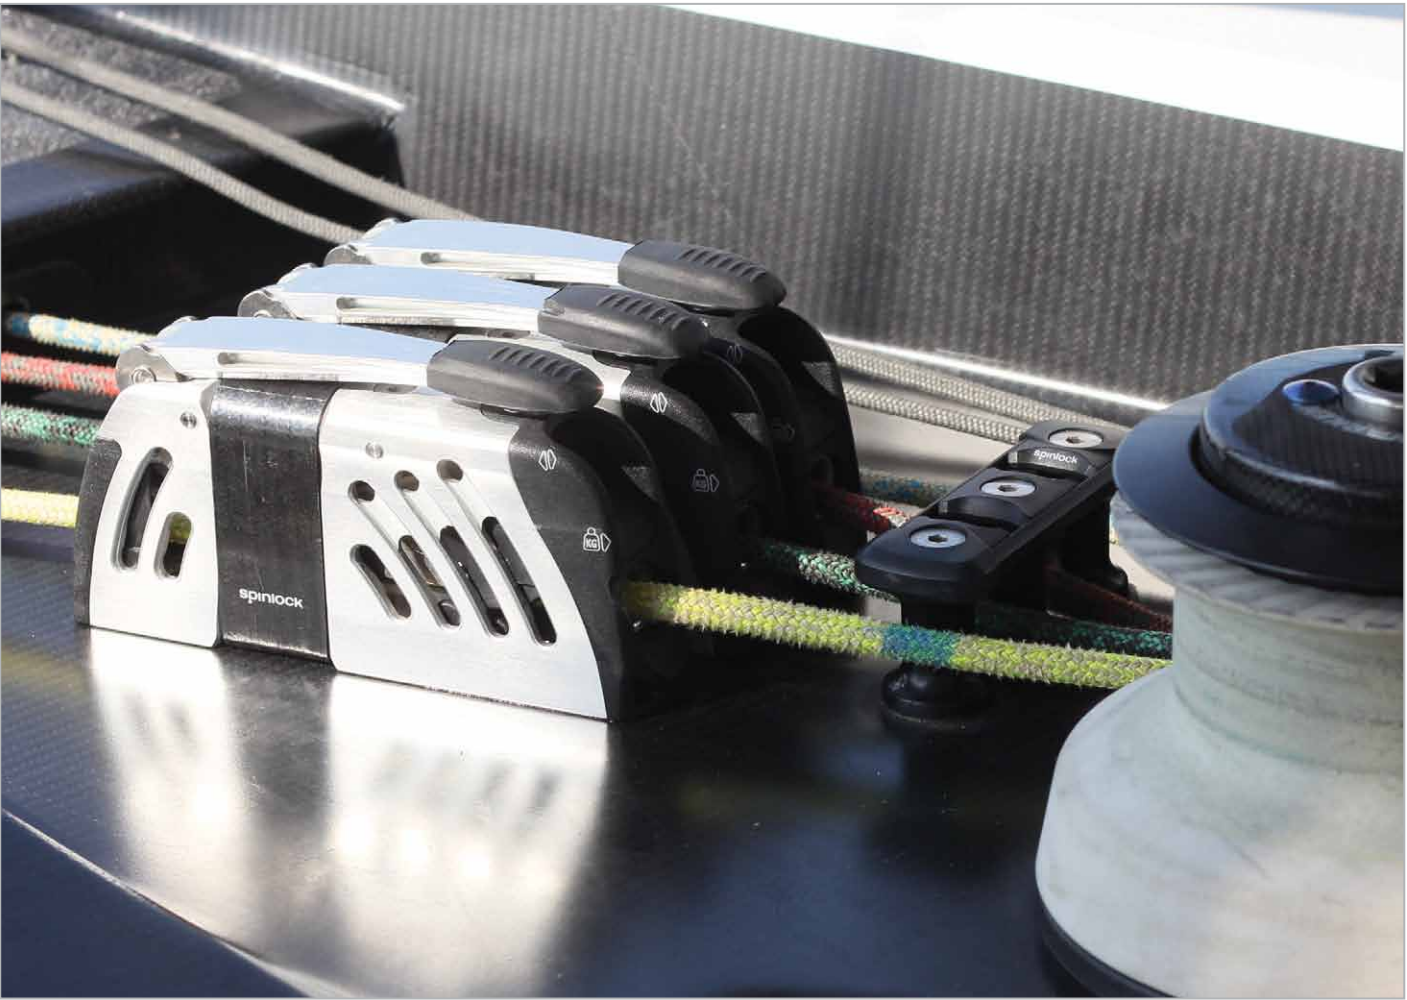

TSR FULLY CUSTOMISABLE ORGANISER

For leading highly loaded lines



TSR Organiser
Aft Organiser for diverting lines from clutches and jammers

and

TSR Low Sheave Organiser
Forward Organiser for diverting high loaded lines

Sheave	20	30	Fixed
Height	Standard	Standard	Standard
	Low	Low	Low
Material	Stainless Steel	Stainless Steel	Stainless Steel
	Titanium	Titanium	Titanium

See tips box on page 54/55

20mm and 30mm diameter alloy sheaves

30mm sheaves for diverting large deflection angles and large diameter lines

All rotating sheaves with plain bearings

Fixed Sheaves can be inserted in the organiser to further increase deflection loads

Alloy top rails

Modular design and assembly – sheaves can be moved to any spacing

Sheave diameters can be optimised for each application

Tulip shaped design reduces friction from vertical deflection

Low profile design

Simple inserting and removal of endless lines

Central shaft designed to spread load through laminate

Titanium parts available to further reduce weight

Custom sheave spacing and Spinlock design service available

TSF Endless Line Organiser
High load Organiser with opening access

Organiser with opening access for endless lines where code sails will be removed from deck

20mm diameter alloy sheaves

Sheave height reduced to maximise sheave load

Very low profile design

All rotating sheaves with plain bearings

Alloy top plate





Model	Description
TSR20/2	Aft Organiser 2 x 20mm Sheave (1 rope) with min sheave spacing
TSR20/3	Aft Organiser 3 x 20mm Sheave (2 rope) with min sheave spacing
TSR20/4	Aft Organiser 4 x 20mm Sheave (3 rope) with min sheave spacing
TSR20/5	Aft Organiser 5 x 20mm Sheave (4 rope) with min sheave spacing
TSR20/6	Aft Organiser 6 x 20mm Sheave (5 rope) with min sheave spacing
TSR20/7	Aft Organiser 7 x 20mm Sheave (6 rope) with min sheave spacing
TSR20/8	Aft Organiser 8 x 20mm Sheave (7 rope) with min sheave spacing
TSR20/9	Aft Organiser 9 x 20mm Sheave (8 rope) with min sheave spacing
TSR20/10	Aft Organiser 10 x 20mm Sheave (9 rope) with min sheave spacing
TSR30/2	Aft Organiser 2 x 30mm Sheave (1 rope) with min sheave spacing
TSR30/3	Aft Organiser 3 x 30mm Sheave (2 rope) with min sheave spacing
TSR30/4	Aft Organiser 4 x 30mm Sheave (3 rope) with min sheave spacing
TSR30/5	Aft Organiser 5 x 30mm Sheave (4 rope) with min sheave spacing
TSR30/6	Aft Organiser 6 x 30mm Sheave (5 rope) with min sheave spacing
TSR30/7	Aft Organiser 7 x 30mm Sheave (6 rope) with min sheave spacing
TSR30/8	Aft Organiser 8 x 30mm Sheave (7 rope) with min sheave spacing
TSR30/9	Aft Organiser 9 x 30mm Sheave (8 rope) with min sheave spacing
TSR30/10	Aft Organiser 10 x 30mm Sheave (9 rope) with min sheave spacing

Model	Description
TSR20L/2	Low Sheave Organiser 2 x 20mm Sheave (1 rope) with min sheave spacing
TSR20L/3	Low Sheave Organiser 3 x 20mm Sheave (2 rope) with min sheave spacing
TSR20L/4	Low Sheave Organiser 4 x 20mm Sheave (3 rope) with min sheave spacing
TSR20L/5	Low Sheave Organiser 5 x 20mm Sheave (4 rope) with min sheave spacing
TSR20L/6	Low Sheave Organiser 6 x 20mm Sheave (5 rope) with min sheave spacing
TSR20L/7	Low Sheave Organiser 7 x 20mm Sheave (6 rope) with min sheave spacing
TSR20L/8	Low Sheave Organiser 8 x 20mm Sheave (7 rope) with min sheave spacing
TSR20L/9	Low Sheave Organiser 9 x 20mm Sheave (8 rope) with min sheave spacing
TSR20L/10	Low Sheave Organiser 10 x 30mm Sheave (9 rope) with min sheave spacing
TSR30L/2	Low Sheave Organiser 2 x 30mm Sheave (1 rope) with min sheave spacing
TSR30L/3	Low Sheave Organiser 3 x 30mm Sheave (2 rope) with min sheave spacing
TSR30L/4	Low Sheave Organiser 4 x 30mm Sheave (3 rope) with min sheave spacing
TSR30L/5	Low Sheave Organiser 5 x 30mm Sheave (4 rope) with min sheave spacing
TSR30L/6	Low Sheave Organiser 6 x 30mm Sheave (5 rope) with min sheave spacing
TSR30L/7	Low Sheave Organiser 7 x 30mm Sheave (6 rope) with min sheave spacing
TSR30L/8	Low Sheave Organiser 8 x 30mm Sheave (7 rope) with min sheave spacing
TSR30L/9	Low Sheave Organiser 9 x 30mm Sheave (8 rope) with min sheave spacing
TSR30L/10	Low Sheave Organiser 10 x 30mm Sheave (9 rope) with min sheave spacing

Larger organisers up to 1m / 25 sheaves are available. Contact our special projects team spt@spinlock.co.uk

TSR ORGANISER

For leading highly loaded line

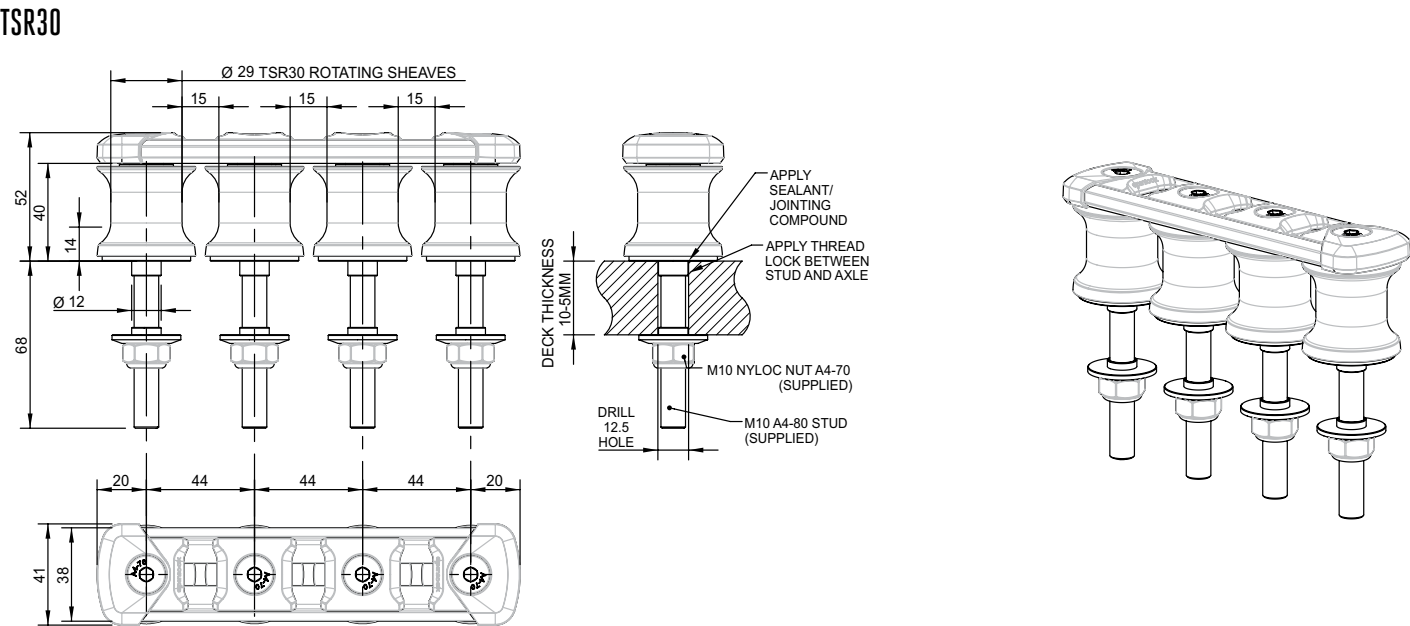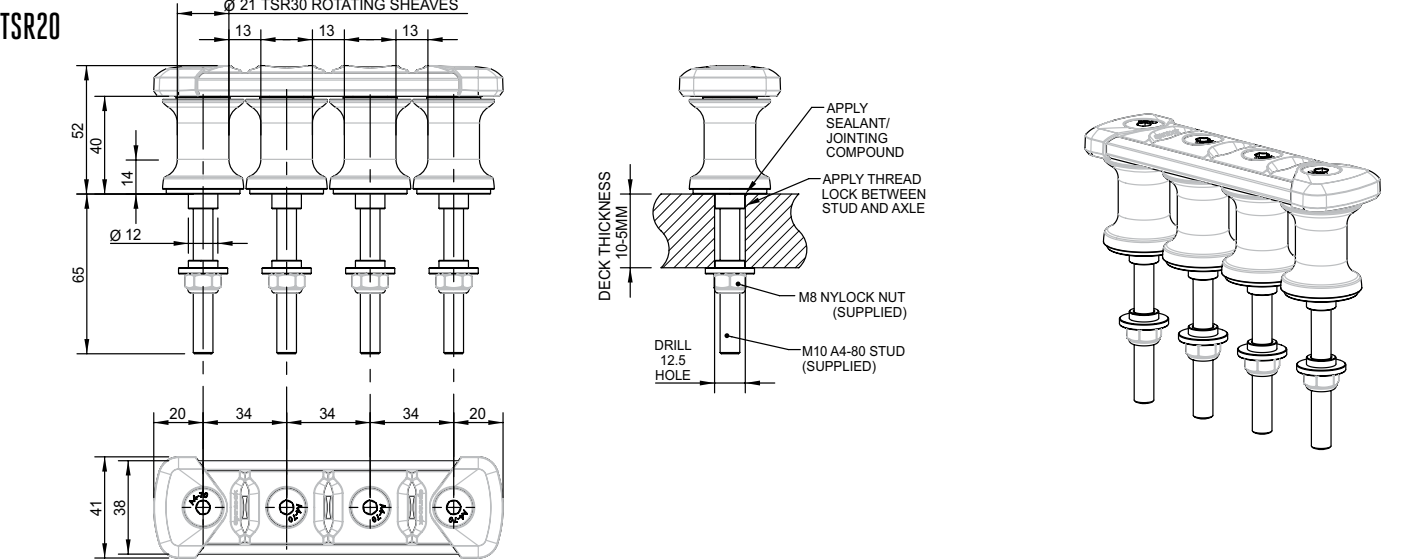


When to use fixed sheaves?
Use fixed sheaves when deflections are low or non-existent and for increased stability and support for highly loaded lines

When to use Titanium?
Specify titanium when weight saving is premium



Maximum Loads	TSR20	TSR30
SHEAVE LOAD	1500kg	2500kg
TOTAL COMBINED SHEAVE LOAD	750kg x number of sheaves	1250kg x number of sheaves
30° DEFLECTED ROPE LOAD	3000kg	5000kg
60° DEFLECTED ROPE LOAD	1500kg	2500kg

SHEAVE SPACING:
MINIMUM SHEAVE SPACING SHOWN. ADJUSTABLE IN 1.0MM INCREMENTS

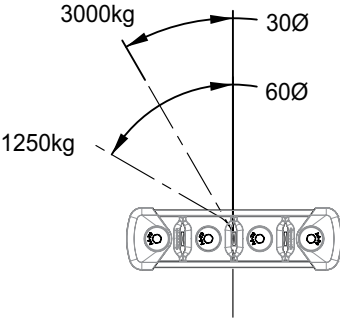

TSR LOW SHEAVE ORGANISER

For leading highly loaded line

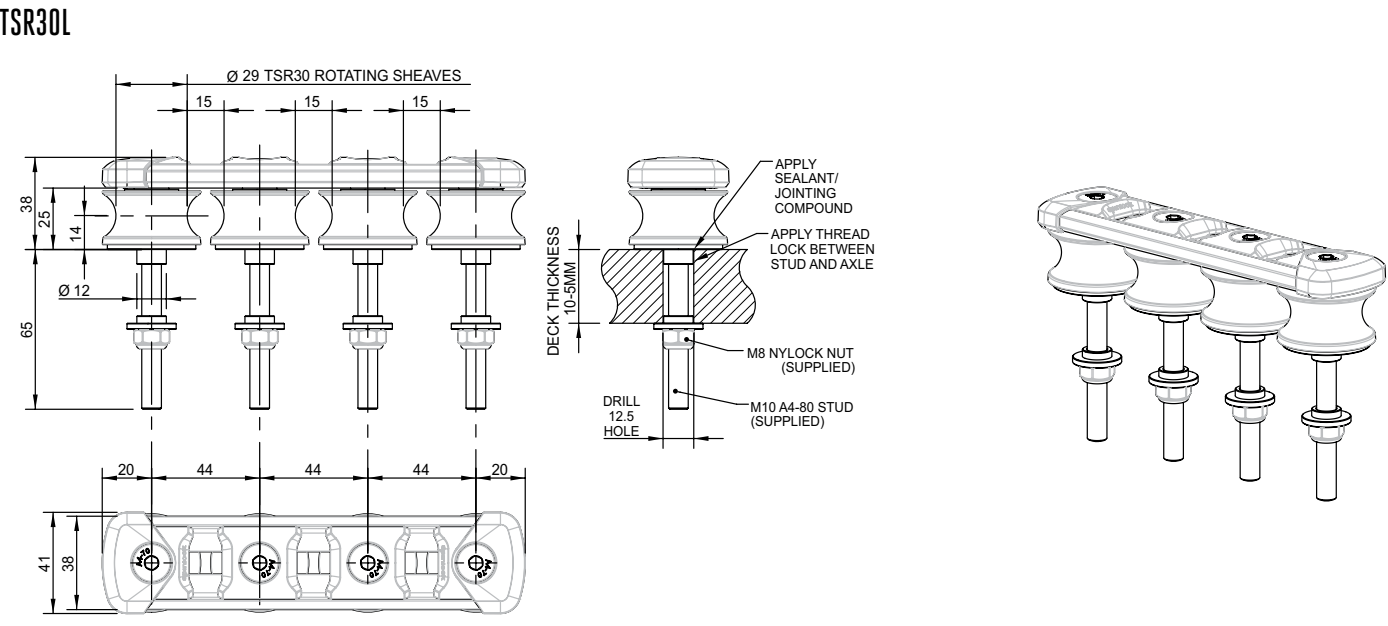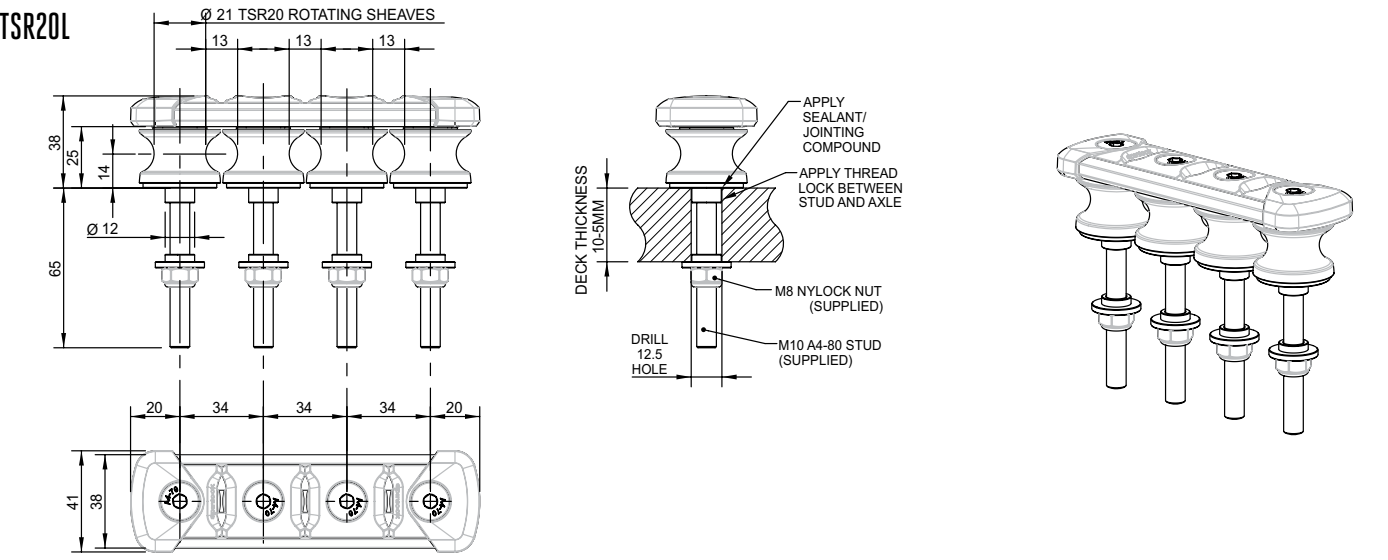


When to use low sheave TSRL?
Use low sheave versions where space is restricted such as in-deck tunnel systems and mast bases

When to use larger diameter 30mm sheaves?
Use 30mm sheaves for diverting highly loaded lines, diverting large deflections and large diameter lines

Maximum Loads	TSR20L	TSR30L
SHEAVE LOAD	1500kg	2500kg
TOTAL COMBINED SHEAVE LOAD	750kg x number of sheaves	1250kg x number of sheaves
30° DEFLECTED ROPE LOAD	3000kg	5000kg
60° DEFLECTED ROPE LOAD	1500kg	2500kg

SHEAVE SPACING:
MINIMUM SHEAVE SPACING SHOWN. ADJUSTABLE IN 1.0MM INCREMENTS

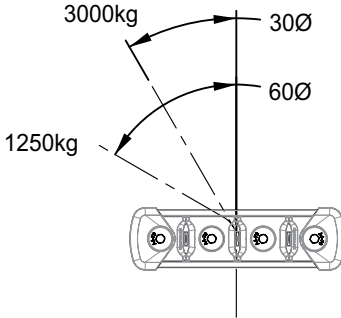

T25 ORGANISER

For Leading Lines



Features

- Fibre-reinforced construction
- Stainless steel ‘wear strip’ prevents local rope damage
- Symmetric or asymmetric configurations with full range of sheaves
- Stainless steel unlinked base for fitting on curved surfaces which simplifies deck sealing
- Double stack with BE10/2 or BE10/3 for leading additional lines



Small boat organiser

Model	Sheave Dia/Type	SWL per sheave	Total SWL per unit	Line Dia	Fastener
T25	25mm (1”) composite	400kg (880lbs)	No of sheaves x 200kg (440lbs)	10mm (3⁄8”)	M5 CSK (3⁄16”)

BE10 MULTIPLE BULLSEYE

For stand alone or use with T25 organisers



Features

- Versatile new solution for low loaded lines, either fitted alone or double stacked onto new T25 organisers
- Integral stainless steel eye construction
- Grouped format minimises the deck space for multiple lines
- Shape deflects easily to fit concave or convex surfaces
- BE10/2s and 3s stack anywhere on the T25 organiser providing a very neat new rope management solution



Model	Description
BE10/2	Double 10mm bullseye
BE10/3	Triple 10mm bullseye

T38, T50 & TC50 ORGANISERS

For Leading Lines



T-Series organisers guide multiple lines from the mast to banks of clutches or jammers

Lines up to 14mm (9/16”)
Loads up to 1500kg (3300lbs)

Features

- Minimal overall length
- Efficient bearings surface reduces winch effort and increases halyard life
- Integral end fairings for safe side loading
- Asymmetric version reduces deck footprint and saves weight
- T38 and T50 can ‘stack’ for limited deck area or adding extra capacity. T50 will also ‘stack’ on TC50
- Vari-camber feature: all T38 and T50 versions are designed to follow the curve of the deck when fitted
- TC50 organisers are specially developed for higher loads

Model	Sheave Dia/ Type	SWL per sheave	Total SWL per unit	Line Dia
T38	38mm (1½”) composite	600kg (1320lbs)	No of sheaves x 300kg (660lbs)	12mm (½”)
T50	50mm (2”) composite	1000kg (2200lbs)	No of sheaves x 500kg (1100lbs)	14mm (9⁄16”)
TC50	50mm (2”) alloy	1500kg (3300lbs)	No of sheaves x 750kg (1650lbs)	14mm (9⁄16”)
TC50/D	50mm (2”) alloy	1000kg upper (2200lbs) 1500kg lower (3300lbs)	No of sheaves x 500kg (1100lbs) No of sheaves x 750kg (1650lbs)	14mm (9⁄16”)



EJB TILLER EXTENSION

Unique Helming Precision



The latest in lightweight, precision helming

Features

- Strong, lightweight anodised aluminium tube
- 360° control - ‘Spinflex’™ joint swivels freely through the full 360° arc
- ‘Spinflex’™ holds tiller in helming position, 30° above horizontal for fast, high agility helming
- The Spinflex™ joint is uniquely pre-moulded at a 30° angle to reduce the bending stress both in use and at rest. It is this induced stress that leads to early failures on most vertically mounted joints
- UV resistant, extra tough ‘Spinflex’™ joint
- Triple-wave handle gives a choice of secure grip positions
- Responsive ‘feel’ and precise helm control
- Less wrist and grip fatigue
- 3 lengths – 600mm, 900mm and 1400mm
- Hole centres allow:
 - upgrade to Spinlock EJ or EA models
 - retrofit from other extension types
- EJB Joint will fit tubes with inner dimensions 13.5mm



Specifications	
EJB/600B	600mm (23 ⁵ / ₈ ")
EJB/900B	900mm (35 ⁷ / ₁₆ ")
EJB/1400B	1400mm (55 ¹ / ₈ ")
EJB-CLIP	Retaining Clip
EJB-JOINT	Replacment Spinflex Joint
EJB-KIT	Clip and Joint

EA TILLER EXTENSION

Unique Helming Precision



Telescopic extensions shaped for precision helming in four standard lengths

Designed for the hardest conditions, to reduce the strain and increase the sheer enjoyment of helming

- Matt Orange
- Matt Light Blue
- Matt Yellow
- Matt Black
- Silver

Convert or replace Spinlock tiller extensions with a Diabolo universal joint. Returns the extension to a vertical position when it is not in use.

Features

- The Asymmetric grip improves helming performance in three ways:
 - More feedback - for accurate and precise control
 - More mobility - maintains the best helming position for optimum trim and visibility
 - Less fatigue - correct helming position reduces back pain and improves concentration
- Asymmetric grip fits the hand and supports the wrist, on or off the wind
- Allows two handed helming with arms relaxed into a more comfortable, elbows-down position
- Push-button adjustment with Torlon™ ball locking mechanism
- Strong stainless steel swivel joint for precise control
- Removable fast pin for easy stowage
- Integral shock absorber
- For more grip select model EA/900SG or add E-GRIP to upgrade

Model	Description	Length
EA/1200B	Matt Black Asymmetric Handle Tiller Extension	750-1200mm
EA/1200DB	Matt Black Asymmetric Handle Tiller Extension with Diabolo universal joint	750-1200mm
EA/1200DL	Matt Light Blue Asymmetric Handle Tiller Extension with Diabolo universal joint	750-1200mm
EA/1200DR	Matt Orange Asymmetric Handle Tiller Extension with Diabolo universal joint	750-1200mm
EA/1200DY	Matt Yellow Asymmetric Handle Tiller Extension with Diabolo universal joint	750-1200mm
EA/1200L	Matt Light Blue Asymmetric Handle Tiller Extension	750-1200mm
EA/1200R	Matt Orange Asymmetric Handle Tiller Extension	750-1200mm
EA/1200Y	Matt Yellow Asymmetric Handle Tiller Extension	750-1200mm
EA/1600B	Matt Black Asymmetric Handle Tiller Extension	1600mm
EA/2000B	Matt Black Asymmetric Handle Tiller Extension	2000mm
EA/900B	Matt Black Asymmetric Handle Tiller Extension	600-900mm
EA/900DB	Matt Black Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EA/900DL	Matt Light Blue Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EA/900DR	Matt Orange Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EA/900DY	Matt Yellow Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EA/900L	Matt Light Blue Asymmetric Handle Tiller Extension	600-900mm
EA/900R	Matt Orange Asymmetric Handle Tiller Extension	600-900mm
EA/900Y	Matt Yellow Asymmetric Handle Tiller Extension	600-900mm



DIABOLO JOINT

EJ TILLER EXTENSION

Unique Helming Precision



Compact tiller extension for competitive helming
Straight handled racket grip Telescopic extensions in four standard lengths

Features

All the features of the Asymmetric EA Tiller Extension but with a slimmer grip
The compact solution for the smaller cockpit and ideal for hiking and fast tacking
EJ grip can be upgraded to Aysmmetric handle specification or vice versa with EA-HDL or EJ-HDL simply by removing two socket screws

Diabolo Version

The diabolo version is preferred by single-handed yachtsmen. A windsurfing style universal joint returns it to a vertical position when not in use
Used in Mini Transat, Open 60s and many other boats predominantly tiller steered by autopilot
Convert or replace Spinlock tiller extensions with a Diabolo universal joint. Returns the extension to a vertical position when it is not in use



Model	Description	Length
EJ/900B	Matt Black Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EJ/900DB	Matt Black Joystick Tiller Extension with Diabolo universal joint	600-900mm
EJ/900L	Matt Light Blue Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EJ/900R	Matt Orange Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EJ/900Y	Matt Yellow Asymmetric Handle Tiller Extension with Diabolo universal joint	600-900mm
EJ/1200L	Matt Light Blue Joystick Tiller Extension	750-1200mm
EJ/1200R	Matt Orange Joystick Tiller Extension	750-1200mm
EJ/1200Y	Matt Yellow Joystick Tiller Extension	750-1200mm
EJ/1200B	Matt Black Joystick Tiller Extension	750-1200mm
EJ/1200DB	Matt Black Joystick Tiller Extension with Diabolo universal joint	750-1200mm

Matt Orange

Matt Black

Matt Light Blue

Silver

Matt Yellow

WL LINE LEADS

Compact Stanchion Lead System



Features

Compact furling line guide system
Reduces line friction during furling
Fairlead model WL/1 straight line guide for intermediate stanchions
Sheave model WL/2 for line entry and exit stanchions with unique tracker-ball angle adjuster for perfect sheave alignment
Complete with fastenings - easy to fit
Replacement sheave for WL/2 available



Lines up to 12mm (1/2")
Stanchion ø 25mm (1")

Model	Line Dia	SWL at max line diameter
WL/1	12mm (1/2")	300kg (660lbs)
WL/2	12mm (1/2")	300kg (660lbs)

BE BULLSEYE

Low Profile Control Line Guides



Features

For guiding lines between two fixed points requiring little horizontal or vertical deflection
Guides extra lines to the cockpit cleats and clutches when no organiser sheaves are available
Double screw fitting (except BE06)
Stainless steel rope guide
6mm, 10mm, 12mm and 16mm sizes
Low profile avoids snagging
Integral gasket sealed base



Improves any deck layout

Lines up to 16mm (5/8")

Model	MaxLine Dia
BE06	6mm (1/4")
BE10/TF	10mm (3/8")
BE12/TF	12mm (1/2")
BE16/TF	16mm (5/8")

BRS SPINNAKER BLOCK

Controlled Spinnaker Handling



Features

- Attached with webbing stop, positioned on the toe rail or padeye
- No drilling, no clutter on deck
- Cam profiled to hold loads up to 20% of the block SWL
- Plain bearing sheave provides smooth running at low loads
- Excellent durability at high loads
- Stop allows fullest rotation for spinnaker sheet use



This jammer block is for situations where a fixed foot block can't help: peeling spinnakers or changing a sheet block

Model	Sheave Dia	SWL (Sheave)	Safe Cam Load	Line Dia
BRS/50	50mm (2")	800kg (1760lbs)	160kg (352lbs)	6-10mm (1/4-3/8")
BRS/63*	63mm (2 1/2")	1200kg (2640lbs)	240kg (528lbs)	8-12mm (5/16-1/2")
* Alloy sheave				

TWF WINCHFEEDER

For Diverting Lines



Features

- Fit a winchfeeder aft of a clutch or jammer to divert lines to an alternative winch
- Useful for leading a line from a clutch on one side to an alternative winch
- Very low 25mm (1") profile keeps winchfeeders safely out of the traffic



Lines up to 12mm (1/2")

Loads up to 1000kg (2200lbs)

Model	Sheave Dia / Type	SWL per sheave	Max Line Dia
TWF/50M	50mm (2") Alloy	800kg (1760lbs)	12mm (1/2")
TWF/63M	63mm (2 1/2") Alloy	1000kg (2200lbs)	12mm (1/2")
* Alloy sheave			

RF SAILFEEDER

Precision Sail Guides



Features

- Graphite loaded, anodised alloy rollers
- Reduced weight for same strength
- Electro Polished 17-4PH high grade stainless steel
- One piece precision investment casting for ultimate strength
- Mainsail feeder RF/MA locates in the mast track below the luff entry and protects luff tape during the hoist. No drilling is needed
- Headsail feeder RF/H guides any flaked genoa from the deck cleanly up into the foil
- Headsail feeders are supplied with a length of line for attachment in their correct free pivoting position between luff entry and deck
- RF/H2 for 60 feet plus racing yachts

New sailfeeders for fast, precise, smooth sail hoists

Model	Tape measurement
RF/MA	Mainsail 11mm (11/16")
RF/H	Headsail 7mm (1/4")
RF/H2	Headsail 7mm (1/4")



ATCU THROTTLE CONTROL

Raceboat throttle solution



Features

- Converts a standard Teleflex™ throttle to a flush socket unit
- Provides removable handle, eliminating risk of line snags when sailing
- Allows the engine control to be located in the best position for the helmsman
- Custom handle option (ATCU-LVR) recommended for a perfect fit
- The ATCU/1 Faceplate is designed to fit Teleflex™ model B700B (Teleflex™ unit not supplied)

Control Type	Kit Contents
ATCU/1*	Faceplate
ATCU/1+*	Faceplate with custom lever
ATCU-LVR	Custom lever

* For assembly with unused control units only



SUA MINI JAMMER

For use with smaller winches



Popular halyard jammer for smaller decks. More power than a camcleat, more compact than a powerclutch

Lines 6 - 10mm (1/4 - 3/8")

Loads up to 400kg (880lbs)

Model	Line Dia	SWL at max line diameter
SUA/1	6-10mm (1/4-3/8")	400kg (880lbs)
SUA/2	6-10mm (1/4-3/8")	400kg (880lbs)
SUA/3	6-10mm (1/4-3/8")	400kg (880lbs)

RP25 ROPE COATING

For Longer Rope Life



Features

RP25 coating protects lines from abrasion and UV damage and significantly improves load holding in a clutch or jammer

Ideal for lines and strops where abrasion risk is high

Significantly increases the working life of lines for both racing and cruising

Reduces risk of critical gear failure

Protects expensive lines against UV degradation

Apply to chafe points on mast sheaves, clutches, lazy jacks, steering cables and furling lines

RP25 is easily applied by brush to selected areas of clean dry line

Good rigging shops now offer a RP25 application service for new and existing lines. See list at www.spinlock.co.uk

PRODUCTS			COVERAGE PER LITRE	
Model	Volume	Kit contents	Diameter	Length
RP25/R	250ml	Application brush, protective gloves, instructions	8mm (5/16")	40m
RP25/L	1000ml	Instructions	10mm (3/8")	28m
RP25/T	5000ml	Instructions	12mm (1/2")	24m
			14mm (9/16")	22m

UPGRADES & SPARES

For Hardware

PXR CAM CLEAT PAGE 38-39

PXR-BRACKET Mast mount for PX & PXR

XAS POWERCLUTCH PAGE 40-41

XAS & XA ACCESSORIES

CAM-XAS	Standard replacement cam
X-LBL	Handle Labels English, French & German
SA29	Spring Arm
XAS-BASE0408	Base upgrade for smaller diameter line
XAS-BASE0612	Base upgrade

XAS ACCESSORIES

XAS-SMNT	Sidemount kit (including fasteners)
XAS-HDL	Handle
XAS-SIDE	Side fairings
XAS-KIT	Base, cam, sides & handle

XA ACCESSORIES

XA-SIDE	High Strength XA Side Fairings (Pair)
SA16	XA Handle

XTS & XCS POWERCLUTCH PAGE 42-43

XTS, XCS, XT & XC ACCESSORIES

CAM-0610	Cam upgrade for 6-10mm line
CAM-0610C	Ceramic Cam upgrade for 6-10mm line
CAM-0814	Cam upgrade for 8-14mm line
CAM-0814C	Ceramic Cam upgrade for 8-14mm line
CAM-1216B	Cam upgrade for 12-16mm line - XCS & XC only
CAM-0812L	Lock-up cam upgrade 8-12mm line
CAM-1214L	Lock-up cam upgrade 12-14mm line
X-BASE	Base
X-BASEC	Ceramic coated base for XTS & XCS models
X-HDL	Black aluminium handle
XTS-KIT	Base, cam and handle
Z-LBL	High spec, high visibility handle labels
X-LBL	Handle Labels English, French & German

XTS & XCS ACCESSORIES

XTS-SIDE	Plastic side fairing for XTS (pair)
XTS-SMNT	Converts standard XTS for side mounting
XCS-SMNT	Converts standard XCS for side mounting

XT & XC ACCESSORIES

X-SIDE	Plastic side fairings for XT only (pair)
XT-KIT	Base, cam and handle

XTR POWERCLUTCH PAGE 44

XTR-KIT	Handle and cam/base module for 8-12mm
XTR-HDL	XTR Handle
XTR-CAM0812	Cam/base module 8-12mm
XTR-SMNT	Converts standard XTR for side mounting

ZR JAMMER PAGE 45

ZR-JAW10	Jaw assembly for ZS1014
----------	-------------------------

XXA POWERCLUTCH PAGE 46-47

XX-KIT	Jaw assembly for XX0812
XX-ROLL	Standard roller set
XX-ROLL+	TORLON™ roller set
XX-MLDG	Moulding kit for models 2010+
XX-HDLB	Handle assembly (black)
XX-LOCK	XX0812 Lock open kit

XXB & XXC POWERCLUTCH PAGE 46-47

XXB-KIT	Jaw assembly for XXB0812
XXC-KIT	Jaw assembly for XXC0812
XXB-HDLB/XXC-HDLB	Black Handle Kit
XXB-HDLA/XXC-HDLA	Amber Handle Kit
XXB-HDLS/XXC-HDLS	Silver Handle Kit
XXB-SMNT/XXC-SMNT	Side Mount Kit

SEE SPINLOCK.CO.UK/PORTAL FOR IMAGES

UPGRADES & SPARES

For Hardware

ZS POWERJAMMER
PAGE 48-49

ZS-JAW08	ZS0810 Jaw Assembly
ZS-JAW08HC	ZS0810 'Ceramic' Jaw Assembly
ZS-JAW12	ZS1214 and ZS1014C 'P' Series Jaw Assembly
ZS-JAW12HC	ZS1214 and ZS1014C 'Ceramic' Jaw Assembly
ZS-JAW16	ZS1618 and ZS1618C 'P' Series Jaw Assembly
ZS-JAW16HC	ZS1618 and ZS1618C 'Ceramic' Jaw Assembly
ZS-JAW18	ZS1824C 'P' Series Jaw Assembly
ZS-JAW18C	ZS1824C 'Ceramic' Jaw Assembly
ZS-MNT0810	Alloy mounting plate
ZS-MNT1214	Alloy mounting plate
ZS-MNT1618	Alloy mounting plate
ZS-MNT1014C	Alloy mounting plate
ZS-MNT1618C	Alloy mounting plate
ZS-MNT1824C	Alloy mounting plate
Z-LBL	High spec, high visibility handle labels
ZS-HDL	ZS1014C & ZS1214 handle only

TSR ORGANISER
PAGE 52-54

TSR20-RL/2	Rail Pair(2) for 2 x 20mm Sheave (1 rope) with min sheave spacing
TSR20-RL/3	Rail Pair(2) for 3 x 20mm Sheave (2 rope) with min sheave spacing
TSR20-RL/4	Rail Pair(2) for 4 x 20mm Sheave (3 rope) with min sheave spacing
TSR20-RL/5	Rail Pair(2) for 5 x 20mm Sheave (4 rope) with min sheave spacing
TSR20-RL/6	Rail Pair(2) for 6 x 20mm Sheave (5 rope) with min sheave spacing
TSR20-RL500	Rail Pair(2) 500mm long each rail
TSR20-RL1000	Rail Pair(2) 1000mm long each rail
TSR20/SHV	TSR20 Sheave Assembly - Single
TSR20/LSHV	TSR20 Sheave Assembly - Single
TSR20L-ESHV	TSR20L End Sheave Assembly - Pair
TSR20L-ESHVF	TSR20L End Sheave Assembly Fixed - Single
TSR30/SHV	TSR20 Sheave Assembly - Single
TSR30/LSHV	TSR20 Sheave Assembly - Single
TSR30L-ESHV	TSR20L End Sheave Assembly - Pair
TSR30L-ESHVF	TSR20L End Sheave Assembly Fixed - Single

T-SERIES ORGANISER
PAGE 57

TB11	Alloy 38mm (1½'') TB series only (pre 2002)
TB17	Composite 38mm (1½'') TB series only (pre 2002)
T38-C	Composite 38mm (1½'') T38 series only
T38-A	Alloy 38mm (1½'') T38 series only
T50-C	Composite 50mm (2'') T50 or TA (pre 2002)
T50-A	Alloy 50mm (2'') T50 or TA (pre 2002)

EJB TILLER EXTENSION
PAGE 58

EJB-CLIP	Retaining Clip
EJB-JOINT	Replacement Spinflex™ Joint

EA & EJ TILLER EXTENSION
PAGE 59-60

EA-HDL	Handle option asymmetric
EJ-HDL	Handle option parallel
E-GRIP	Tube sleeve grip
E-DIABOLO	Stand up universal joint
E-JOINT	Full swivel joint with fastpin
E-SHOCK	Shock absorber
E-SLEEVE	Replacement pivot housing
E-FASTPIN	Full swivel joint release pin
E-BUTTON	Control button
E-CLIP	Tiller clip for all models
E-KIT	Button, clip and sleeve

WL FURLING LINE LEAD
PAGE 61

WL-SHEAVE	Replacement sheave for WL/2
-----------	-----------------------------

BRS SPINNAKER BLOCK
PAGE 62

BRS-STROP	Replacement strop for both models
-----------	-----------------------------------

ATCU THROTTLE CONTROL
PAGE 63


ATCU-LVR	Custom lever for throttle control
----------	-----------------------------------

WEIGHTS & FASTENERS


PAGE	PRODUCT	MODEL	WEIGHT	FASTENERS	SUPPLIED	CSK HEAD	PAN HEAD	STUD	HEX HEAD
38-39	PXR CAMCLEAT	PXR0206	43g (1.5oz)	2 x M4 (5/32'')	-	✓	-	-	-
		PXR0810	84g (2.9oz)	2 x M5 (3/16'')	-	✓	-	-	-
		PXR0206/SW	77g (2.7oz)	3 x M5 (3/16'')	-	✓	-	-	-
		PXR0810/SW	124g (4.3oz)	3 x M5 (3/16'')	-	✓	-	-	-
		PXR0206/VP	97g (3.4oz)	Bracket mount	-	-	✓ (or rivet)	-	-
		PXR0206/T	53g (1.9oz)	2 x M4 (5/32'')	-	✓	-	-	-
40-41	XAS POWERCLUTCH	PXR0810/T	101g (3.5oz)	2 x M5 (3/16'')	-	✓	-	-	-
		XAS0408/1	270g (9.5oz)	2 x M6 (1/4'')	-	✓	-	-	-
		XAS0408/2	500g (17.5oz)	4 x M6 (1/4'')	-	✓	-	-	-
		XAS0408/3	680g (23.8oz)	6 x M6 (1/4'')	-	✓	-	-	-
		XAS0612/1	270g (9.5oz)	2 x M6 (1/4'')	-	✓	-	-	-
		XAS0612/2	500g (17.5oz)	4 x M6 (1/4'')	-	✓	-	-	-
		XAS0612/3	680g (23.8oz)	6 x M6 (1/4'')	-	✓	-	-	-
42	XTS POWERCLUTCH	XTS0814/1	545g (19.1oz)	2 x M8 (5/16'')	-	✓	-	-	-
43	XCS POWERCLUTCH	XCS0814/1	630g (22.1oz)	2 x M8 (5/16'')	-	✓	-	-	-
		XCS0814/2	1130g (39.6oz)	4 x M8 (5/16'')	-	✓	-	-	-
		XCS0814/3	1610g (56.4oz)	6 x M8 (5/16'')	-	✓	-	-	-
44	XTR POWERCLUTCH	XTR0812	340g (12.0oz)	2 x M8 (5/16'')	-	-	-	-	✓
		XTR0812/H	456g (16.1oz)	3 x M6 (1/4'')	✓	-	-	Button Head	-
45	ZR JAMMER	ZR1014	505g (17.8oz)	2 x M8 (5/16'')	✓	-	-	Button Head	
46	XXA POWERCLUTCH	XX0812	1080g (38.1oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XX0812/HP	1130g (39.9oz)	5 x M6 (1/4'')	✓	✓	-	-	-
		XX0812/HPR	955g (33.7oz)	5 x M6 (1/4'')	✓	✓	-	-	-
		XX0812/L	1080g (38.1oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XX0812/R	905g (31.9oz)	2 x M8 (5/16'')	✓	-	-	-	✓
46	XXB POWERCLUTCH	XXB0812	1080g (38.1oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XXB0812/HP	1130g (39.9oz)	5 x M6 (1/4'')	✓	✓	-	-	-
		XXB0812/HPR	955g (33.7oz)	5 x M6 (1/4'')	✓	✓	-	-	-
		XXB0812/L	1080g (38.1oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XXB0812/R	905g (31.9oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XXB0812/S	1080g (38.1oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XXB0812/SL	1080g (38.1oz)	2 x M8 (5/16'')	✓	-	-	-	✓
		XXB0812/SR	905g (31.9oz)	2 x M8 (5/16'')	✓	-	-	-	✓
46	XXC POWERCLUTCH	XXC0812	900g (31.7oz)	2 x M8 Titanium	✓	-	-	-	✓
		XXC0812/S	900g (31.7oz)	2 x M8 Titanium	✓	-	-	-	✓
		XXC0812/HP	955g (33.7oz)	5 x M6 Titanium	✓	✓	-	-	-
		XXC0812/HBP	905g (31.9oz)	Bonded	-	-	-	-	-
48-49	ZS POWERJAMMER	ZS0810	750g (26.3oz)	3 x M8	✓	-	-	✓	-
		ZS1214	1390g (49.0oz)	4 x M8	✓	-	-	✓	-
		ZS1618	2025g (70.9oz)	6 x M10	✓	-	-	✓	-
		ZS1014C	1070g (37.7oz)	4 x M10	✓	-	-	✓	-
		ZS1014B	631g (22.3oz)	-	-	-	-	-	-
		ZS1618C	1790g (63.1oz)	6 x M10	✓	-	-	✓	-
		ZS1618B	910g (32.1oz)	-	-	-	-	-	-
		ZS1824C	2100g (73.5oz)	10 x M10	✓	-	-	✓	-
		ZS2632C	5100g (179.9oz)	14 x M10	✓	-	-	✓	-

DIMENSIONS


PAGE 44
XTR POWERCLUTCH

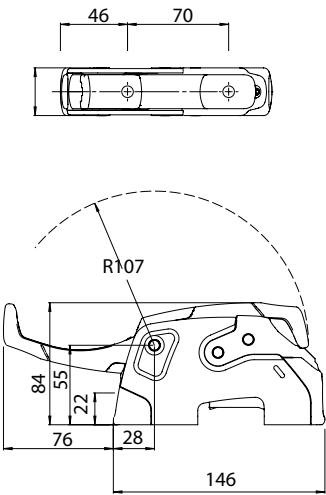


PAGE 46
XX POWERCLUTCH

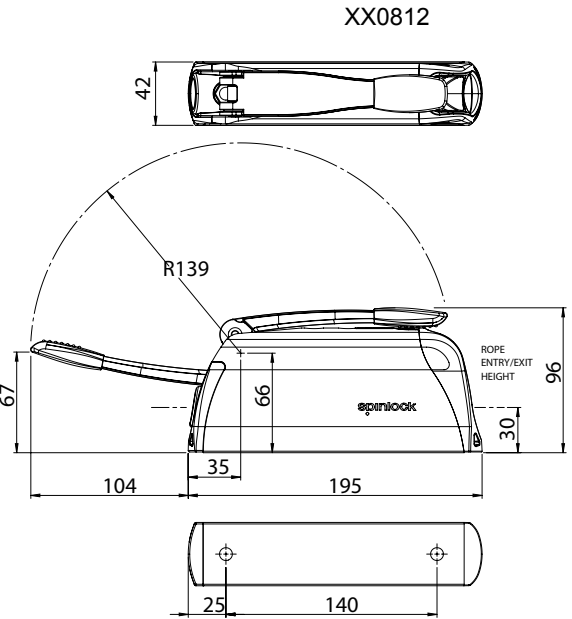

PAGE 42-43
XTS & XCS POWERCLUTCH

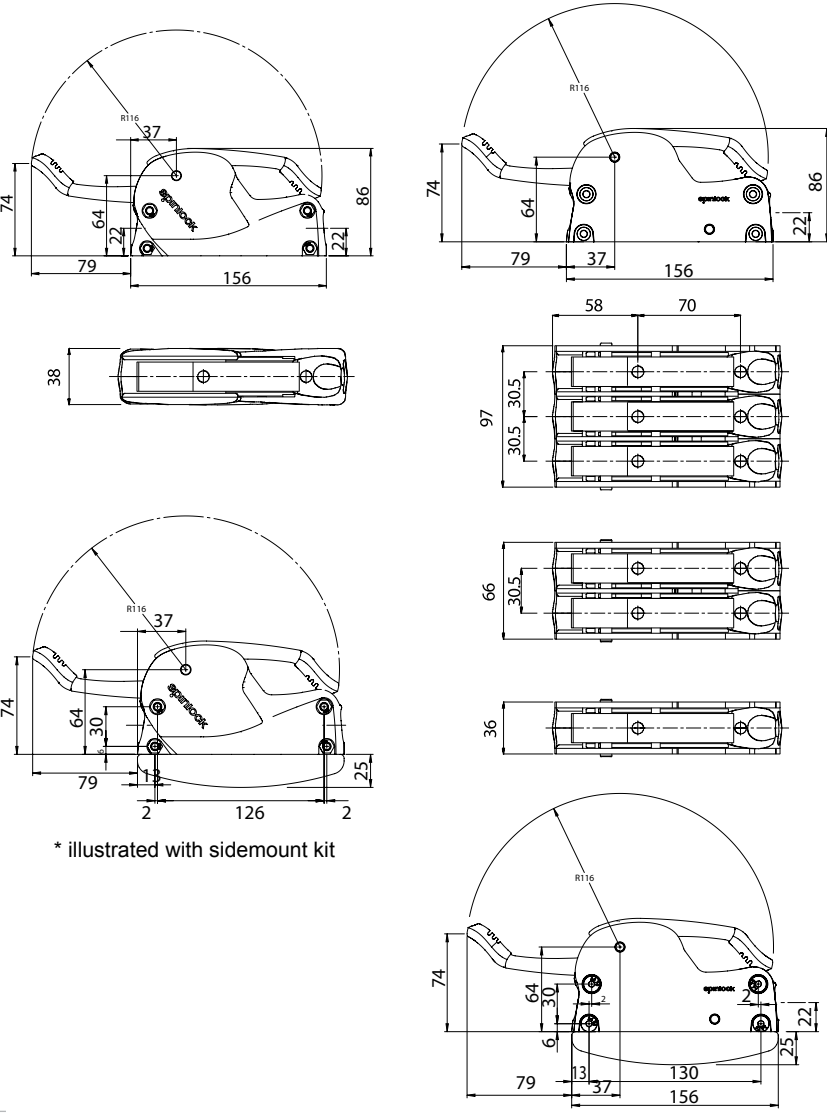


PAGE 45
ZR JAMMER

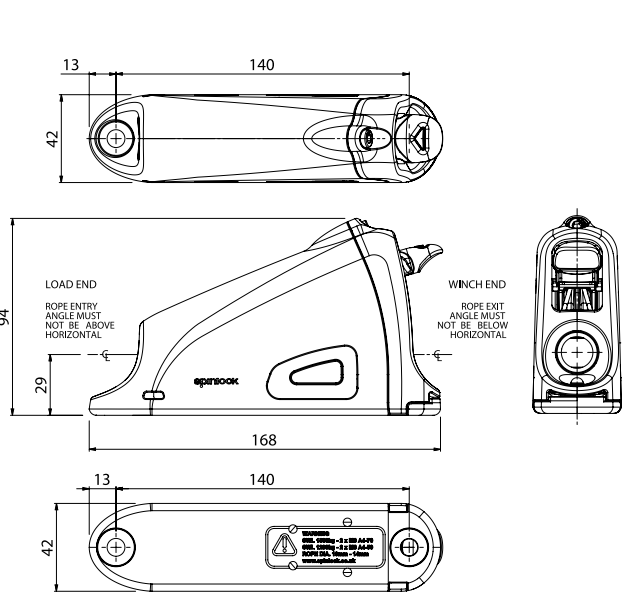

Drawings not to scale: Do not use as drill templates


PAGE 51
PD PADEYE

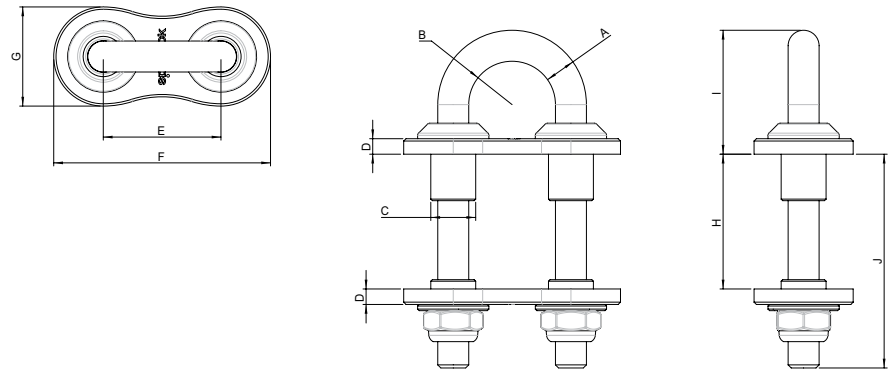

	A	B	C	D	E	F	G	H	I	J
PD-6C	6mm	10mm	10mm	3mm	Drill 2 x 10.5mm Holes on 25.0 Centres	45mm	20mm	Max 42.0 Min 8.0	24.2mm	55mm
PD-8C	8mm	12mm	12mm	3mm	Drill 2 x 12.5mm Holes on 32.0 Centres	58mm	26mm	Max 47.0 Min 13.0	30.0mm	62mm
PD-10C	10mm	14mm	15mm	5mm	Drill 2 x 15.5mm Holes on 38.0 Centres	70mm	32mm	Max 45.0 Min 23.0	40.0mm	69mm
PD-12C	12mm	18mm	17mm	5mm	Drill 2 x 17.5mm Holes on 50.0 Centres	88mm	38mm	Max 45.0 Min 23.0	46.0mm	86mm


Drill guides available at spinlock.co.uk

PAGE 48-49
ZS POWERJAMMER

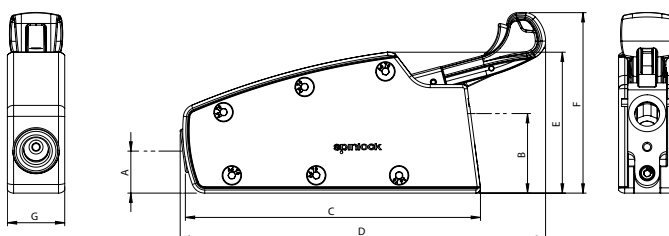

A	Rope Entry Height	25mm	27mm	33mm
B	Rope Exit Height	43mm	51mm	60mm
C	Body Length	163mm	190mm	218mm
D	Length all Over	173mm	235mm	261mm
E	Body Height	78mm	91mm	108mm
F	Height Overall	95mm	116mm	130mm
G	Body Width	31mm	37mm	46mm


ZS CARBON POWERJAMMER

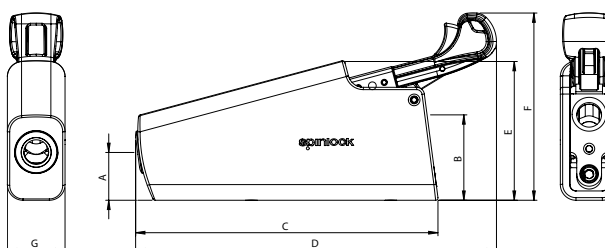

		ZS1014C	ZS1618C
A	Rope Entry Height	31mm	37mm
B	Rope Exit Height	55mm	63mm
C	Body Length	195mm	224mm
D	Length all Over	233mm	260mm
E	Body Height	90mm	105mm
F	Height Overall	121mm	134mm
G	Body Width	37mm	46mm

Drill guides available at spinlock.co.uk

PAGE 56
T25 ORGANISER

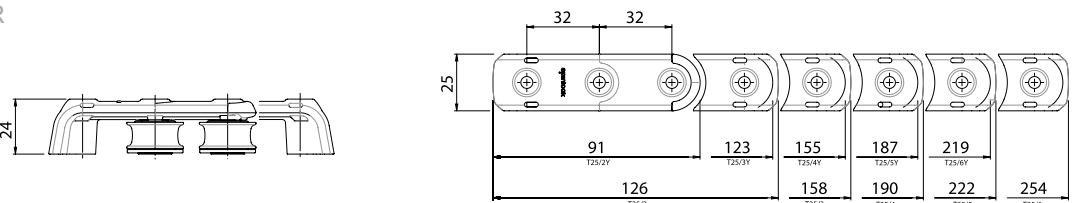


Drawings not to scale: Do not use as drill templates


DIMENSIONS

PAGE 57
T SERIES ORGANISER


Symmetric & Asymmetric versions

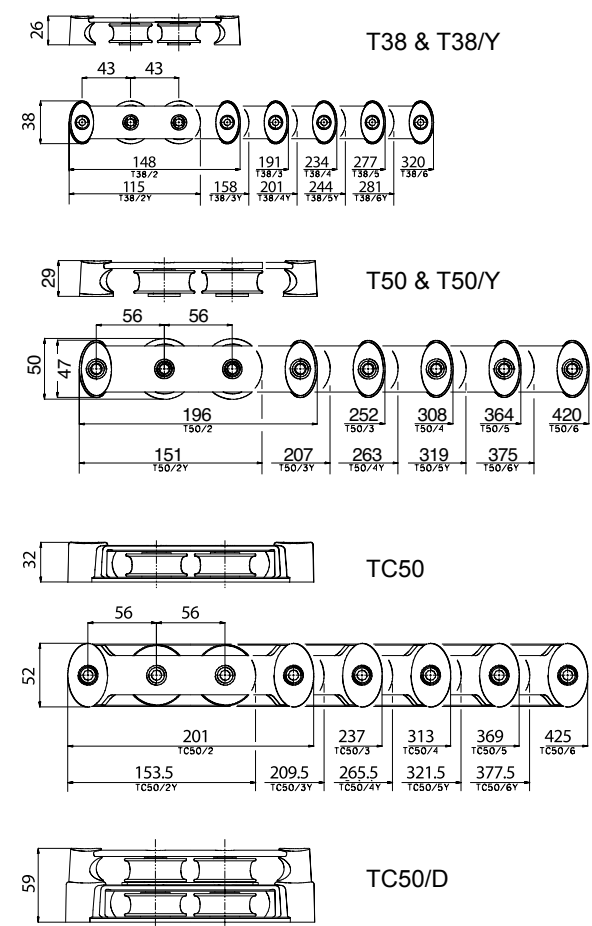


PAGE 61
WL LINE LEAD

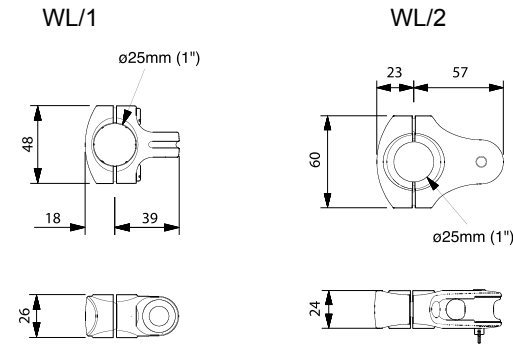


PAGE 56
BE MULTIPLE BULLSEYE

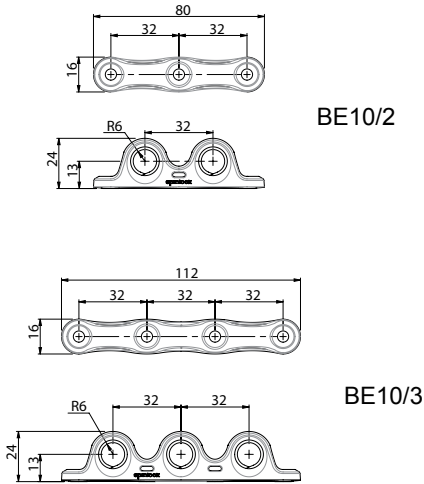

PAGE 58
EJB TILLER EXTENSION

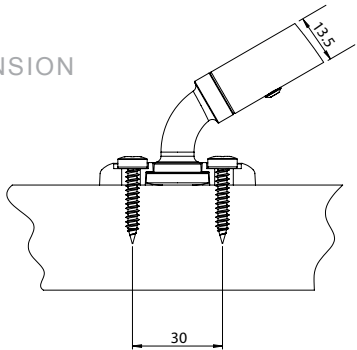


PAGE 59-60
EA & EJ TILLER EXTENSION

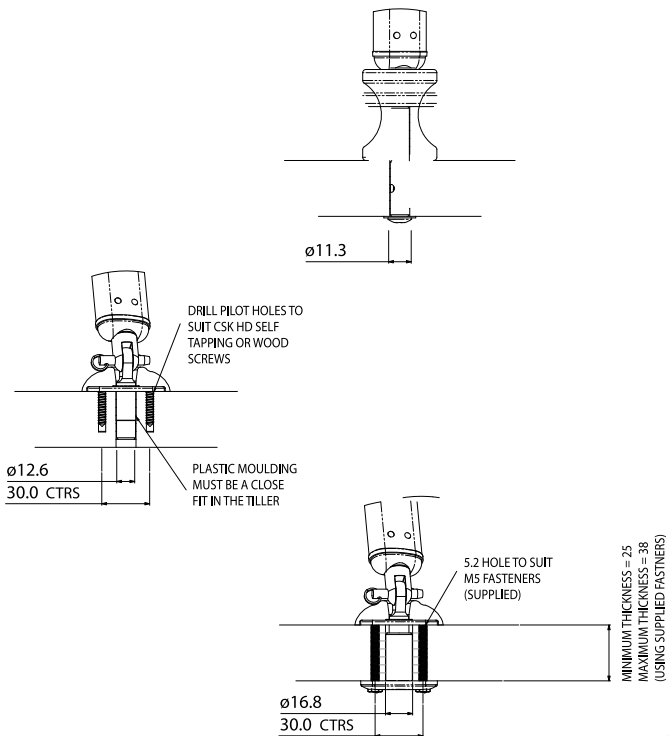


Drawings not to scale: Do not use as drill templates

PAGE 61
BE BULLSEYE & BE BULLSEYE TWIN FIX

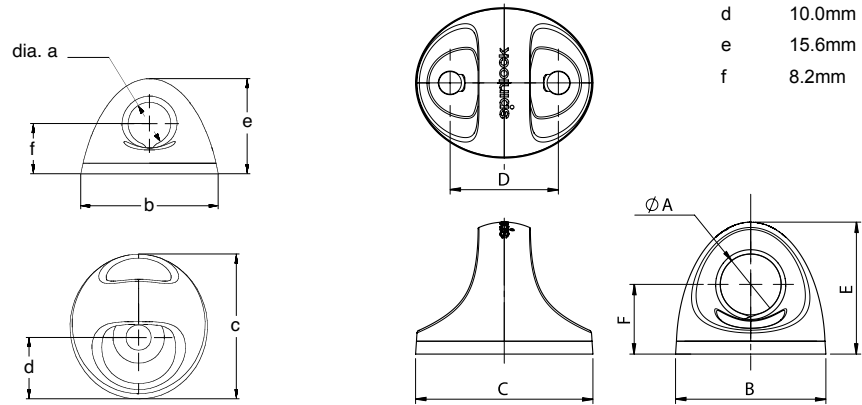


	BE06	BE10/TF	BE12/TF	BE16/TF
a	7.0mm	11.0mm	13.5mm	17.0mm
b	22.5mm	27.8mm	33.3mm	39.3mm
c	23.6mm	32.8mm	39.3mm	52.4mm
d	10.0mm	20.0mm	24.0mm	32.0mm
e	15.6mm	24.4mm	29.3mm	39.0mm
f	8.2mm	12.8mm	15.5mm	20.5mm

PAGE 62
TWF WINCHFEEDER




PAGE 62
BRS SPINNAKER BLOCK

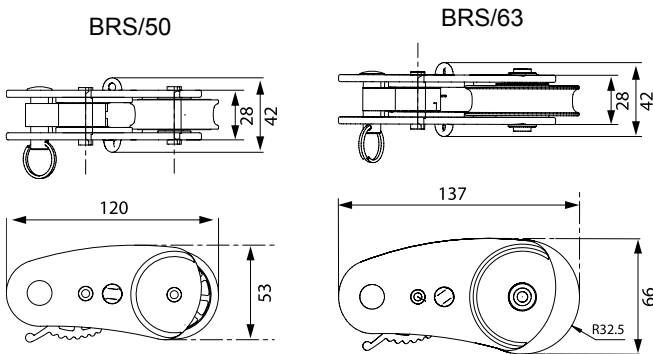

Drawings not to scale: Do not use as drill templates

PAGE 64
SUA MINI JAMMER

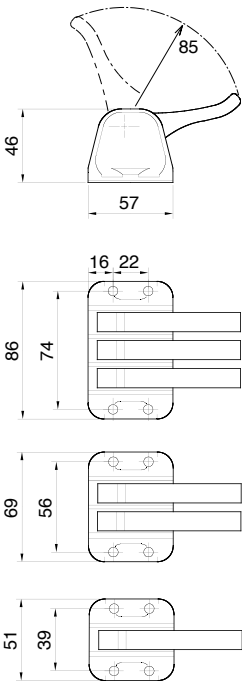

MARKETING MATERIALS MENU 2018

A guide to Spinlock resources available to you

Our growing range requires many display options for store and exhibition. For 2018 we have a new set of displays for the Deckware range which offers a complete flexible system of assembly to suit the space and stock being displayed.

Displays are also coupled with a wide range of posters, standup graphics and headers, plus we are always happy to discuss custom options to suit your display and merchandising needs.

PORTAL - spinlock.co.uk/portal

IMAGES

Download all of the latest Spinlock images, both studio and action shots, to use online, in-store, for advertising and all other promotional uses.

VIDEOS

Download all of the latest Spinlock images, both studio and action shots, to use online, in-store, for advertising and all other promotional uses.

PRESS RELEASES

Download the latest Spinlock press releases to use online, hand out at events. Keep yourself and others up to date with the latest Spinlock products and their features.

TRAINING MANUAL

Updated and improved training manual gives detailed information about every product in the Spinlock ranges.

2018 TRADE GUIDE

Detailed product information. Incorporates both Hardware and Deckware ranges including dimensions and resources.

GRAPHICS, ADVERTS & POS

Download the latest digital resources from Spinlock, including A5, A4 and A3 posters, to print yourself or get printed locally. Including posters of striking action images of Spinlock products in use.

PRODUCT WEIGHTS

Download a helpful product weights and dimensions spreadsheet or reference the individual product weights online.

TRADE GUIDE

TRADEGUIDE-GBR18
TRADEGUIDE-FRA18
TRADEGUIDE-ESP18
TRADEGUIDE-GER18
TRADEGUIDE-SWE18
TRADEGUIDE-ITA18



TRAINING MANUAL

Training Manual (electronic only)
Updated and improved training manual gives detailed information about the complete hardware and deckware ranges



PRO SUPPORT

Online technical support from the Spinlock team - prosupport@spinlock.co.uk

CAD LIBRARY

Technical files including drill guides and cad files are available to download from the Cad Library - spinlock.co.uk/cadlibrary


NEW DECKWARE RETAIL DISPLAYS 2018

Add additional arms to extend capacity and hang extra products



Deckware Retail Display
RET-DW15
W - 50cm
D - 40cm
H - 180cm

Add product wire frames



Deckware Retail Display Large
RET-DWL15
W - 125cm
D - 40cm
H - 180cm

Arms extend capacity and hang extra products depending on space



Deckware Retail Display Xtra Large
RET-DWXL15
W - 158cm
D - 40cm
H - 180cm

Wire frames, side arms, hangers and extra graphics holders not included; see below.

ACCESSORIES



1 x Graphics Holder Pole



Side Arm
3M015TW



Side Arm & Short Hanger
3M010TW



Side Arm & Short Hanger Double
3M011TW



Side Arm & Long Hanger
3M012TW



Side Arm & Long Hanger Double
3M013TW

Model	Description
RET-DW15	Deckware Retail Display
RET-DWL15	Deckware Retail Display Large
RET-DWXL15	Deckware Retail Display Xtra Large
PTO148	Headercard
3M015TW	Side Arm
3M010TW	Side Arm & Short Hanger
3M011TW	Side Arm & Short Hanger Double
3M012TW	Side Arm & Long Hanger
3M013TW	Side Arm & Long Hanger Double
Additionally, with these units, customers might order product wire frames of choice:	
3M014TW	Wire Frame Hanger
RET-DW/FRAMEDV	Deckvest 5D frame
RET-DW/FRAMEDVL	Deckvest LITE frame
RET-DW/FRAMEFOIL	FOIL frame
RET-DW/FRAMEWING	WING frame
RET-DW/FRAMECENTO	Deckvest CENTO frame
RET-DW/FRAMEMPH	Wire Frame Display Mast Pro Harness
RET-DW/FRAMESFL	Wire Frame Display Safety Lines
RET-DW/FRAMEKNEE	

DECKWARE RETAIL GRAPHICS & POSTERS



RET-DVR/GRAPHIC
Deckvest 5D & LITE
Retail Graphic




RET-PFDW/GRAPHIC
WING
Retail Graphic




RET-DV/GRAPHIC
Deckvest 5D
Retail Graphic



RET-PFDF/GRAPHIC
FOIL
Retail Graphic



RET-DVL/GRAPHIC
Deckvest LITE
Retail Graphic



RET-DVC/GRAPHIC
Deckvest CENTO
Retail Graphic

See examples of custom headerboards, poster boards and window vinyls, as well as animated GIF, online graphics and artwork for newsletters. Many artwork files are on the Spinlock Portal.



Contact Spinlock for custom sizes and artwork.








www.spinlock.co.uk

Facebook Twitter Instagram







SOUTHAMPTON BOAT SHOW
15-24 SEPTEMBER 2017





INSPIRING OUR INNOVATION



INSPIRING OUR INNOVATION



DECKWARE & HARDWARE DISPLAYS & RETAIL SHELVES



Product Wire Frame Displays for shop walls

(Mounts to slat or peg wall)

RET-DW/FRAMEDV	£50
RET-DW/FRAME/DVL	£50
RET-DW/FRAMEFOIL	£50
RET-DW/FRAMEWING	£50



Retail Active Shelf Display


(Includes PXR, XAS & XTS)

RET-SHELF14	£40.00
-------------	--------



Retail Active PXR Shelf Display

RET-SHELFPRX06	£20.00
----------------	--------



High Load Shelf Extension

RET-SHELFHL08	£60.00
---------------	--------



Retail Slat Wall Display

RET-W ALL0 4	£40.00
--------------	--------



Retail Slat Wall with Shelf Display

RET-COMB04	£80.00
------------	--------

RETAIL IDEAS

New Retail Gondola Display

The 4 side retail gondola display unit is now available. This display enables the clear and simple display of Spinlock products from both the Hardware and Deckware ranges together if necessary, maximising space.

The unit has a small footprint measuring 1200mm². The height of the unit measures 1300mm with the option for a removable mannequin or wire frame system to be on top creating more interest and using all available space. It works well in conjunction with the new Deckware retail displays (see page 75).

Contact Spinlock to discuss requirements.

